

ePAD™ 5.0 Mobile Keypad

Description

The ePAD™ 5.0 Mobile Keypad allows users to control their security systems through the Internet. The ePAD easily installs in the panel enclosure and is compatible with all DMP Command Processor™ panels. Program the ePAD using an Internet browser.

What is Included

The ePAD includes the following items:

- One ePAD™ 5.0 Mobile Keypad
- One 4-wire harness to connect to the panel
- One 330 Programming Cable

What else is Needed

A network cable is required to provide constant connection to a broadband network such as DSL, cable modem, or T1.

Note: If the ePAD is installed in a site that uses a computer connected to the Internet, a router is needed. Refer to the ePAD Technical Note (LT-0670) for complete information on configuring the network router.

If you must change the ePAD IP Address, you need a DMP LCD, 32-character keypad such as a Model 7060 keypad. Refer to the ePAD Programming Guide (LT-0664) for IP Address programming.

Note: Some information, such as the IP Address and HTTP Port numbers, is required for programming and must be obtained from the network administrator or Internet Service Provider (ISP).

Mounting the ePAD with the 3-Hole Pattern

Mount the ePAD inside the panel enclosure using the 3-hole mounting configuration. See Figure 1.

1. Turn the standoff nearest the edge parallel with the ePAD edge so the ePAD easily fits in the panel enclosure. See Figure 3.
2. Line up the three standoffs on the ePAD with the three holes in the enclosure.
3. Press evenly on the ePAD to firmly snap and lock into place.

Edge Mount the ePAD

You can also mount the ePAD on the enclosure edge by hanging it by the casing edge. Refer to Figure 2.

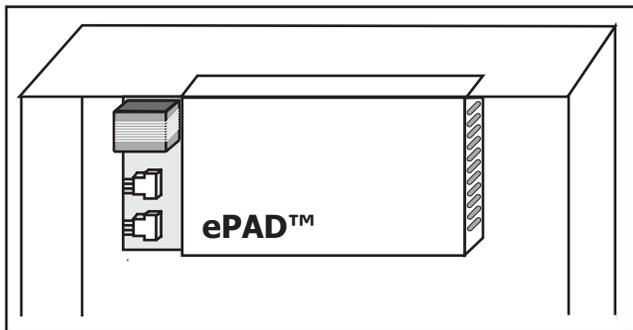


Figure 2: ePAD Installed on Enclosure Edge

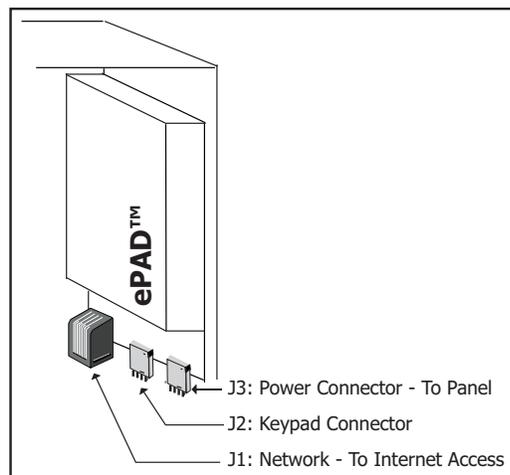


Figure 1: ePAD 3-Hole Pattern Installation

1. Starting with the connector end of the ePAD, slide the ePAD top edge casing onto the edge of the panel enclosure.
2. Press the ePAD until the entire top side of the casing hangs on the enclosure edge.

Other Mounting Options

When a 3-hole pattern is not available in the panel enclosure and edge mounting is not possible, you can mount the ePAD in a separate DMP Model 349 Enclosure. The Model 350D Mounting Plate installed in an enclosure can also be used for mounting the ePAD.

ePAD LED Indicators

Refer to Figure 3 for the LED locations.

Network and Error LEDs

Link: A steady green LED indicates the communication link to the network is working.

Activity: A flashing yellow LED indicates activity on the network.

Error 2: A steady LED when the following errors occur:

Error 1: Blinks 1 time if the ePAD is connected to a network with a duplicate IP address.

Error 1: Blinks 6 times if the ePAD is programmed with an IP address and does not detect a network connection.

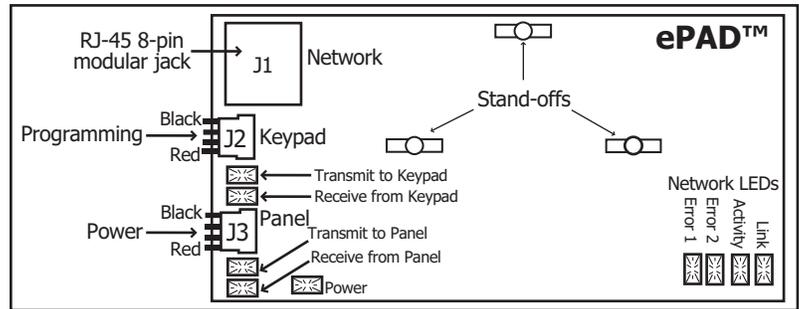


Figure 3: ePAD PCB

Communication LEDs

There are two pairs of Transmit and Receive LEDs for communication. One pair for keypad communication and one pair for panel communication through the J3 4-pin header.

Transmit: Flashing yellow LED indicates the unit is transmitting data to the panel.

Receive: Flashing yellow LED indicates the unit is receiving data from the panel.

Power LED

The Power LED is on when the unit receives power.

Wiring the ePAD

Follow the steps below for wiring the ePAD to the panel and network connection.

1. Attach the supplied 4-wire harness to the 4-pin header on the ePAD J3 Panel header.
2. Connect the red wire to the panel terminal 7, yellow wire to terminal 8, green to 9, and black to terminal 10.
3. Connect the network cable supplied by the site network administrator to the ePAD J1 Ethernet connector.

<p>Specifications</p> <p>Primary Power 9 - 14 VDC Current Draw 80mA Dimensions .75" x 3" x 5.5"</p> <p>Compatibility</p> <p>XT30/XT50 Series panels. XR100/XR500 Series panels.</p>	<p>Listings and Approvals</p> <p>FCC Part 15</p>
	<p>800-641-4282 www.dmp.com Designed, Engineered and Assembled in U.S.A.</p>
<p>INTRUSION • FIRE • ACCESS • NETWORKS</p> <p>2500 North Partnership Boulevard Springfield, Missouri 65803-8877</p>	