

XR100/XR500 Series

October 2012

Version 211 Software Update

The XR100/XR500 Version 211 (9/21/12) software is now available for download on the DMP Dealer Direct Website at <http://dmp.com/dealer>.

Effective October 31, 2012, all XR100 and XR500 Series panels will be manufactured with updated Version 211 software. As of December 12, 2012, inventory for the XR100 and XR500 panels will be completely updated to 211 (9/21/12) software.


Features

CDMA Cellular Communication

XR100/XR500 Series panels with Version 211 now support CDMA cellular communication when using the new Model 463C CDMA Cellular Communicator.

463C CDMA Cellular Communicator

- Plug-in or external communication module available for XR100/XR500 Series™ panels
- Plug-and-play installation and activation
- Uses digital cellular CDMA data networks in the US
- Cellular data throttling offers overage suppression
- Direct cellular communication enables a direct path for alarm signals from the panel to the monitoring station
- Transmits SMS status messages to multiple recipients
- No additional external support equipment required
- Can be equipped with local or remote antenna, with simple conduit knockout for in-panel installations
- Check signal strength indication at the keypad

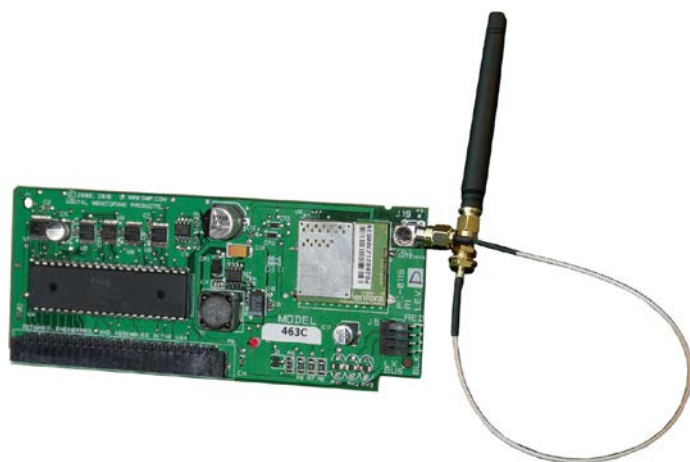

Activate Cell

XR100/XR500 Series panels with Version 211 now have the Activate Cell prompt in Diagnostics Function to support the 463C CDMA Cellular Communicator. When using the 463C, the cellular service must be activated at this prompt for the module to function.

Activate Cell

To begin the cellular activation for a 463C CDMA Cellular Communicator, verify that the 463C MEID has been added for the panel using Remote Link or by calling Customer Service (1-800-641-4282). At the keypad, press any top row Select key when **ACTIVATE CELL** is displayed on the keypad. When the **SURE NO YES?** confirmation menu appears press the Select key beneath YES to complete the cellular activation.

Note: This option only displays if a 463C is attached to the panel.

Successful Display	Failure Display
CELL ACTIVATED	NOT ACTIVATED

Updated Operation

Output Group Remote Programming


For each device programmed in Device Setup, XR500/XR100 Series panels with Version 209 4/3/12 or higher software would send to Remote Link an incorrect character in the Output Group option instead of Yes (Checked) or No (not-Checked). Remote Link would automatically set the option as not-Checked. If Device Setup programming was sent back to the panel at a later time, Remote Link's default value for the Output Group option (NO) would be sent always turning off the option in the panel.

XR500/XR100 panels with version 211 (9/21/12) now send the correct programming for the Output Group options.

Obtaining the New Software

XR100/XR500 Series software updates are available for download free of charge on the DMP Dealer Direct Website at <http://dmp.com/dealer>.

TU-0651 © 2012 Digital Monitoring Products, Inc.

	800-641-4282	INTRUSION • FIRE • ACCESS • NETWORKS
	www.dmp.com	2500 N. Partnership Boulevard
	Made in the USA	Springfield, Missouri 65803-8877