

Remote Link and System Link Software Update


January 19, 2004

New Feature

XR500N Panic Test Communication

Remote Link now allows programming of the new Panic Zones Test option available in the System Reports programming of the XR500N version 102 or higher.

Panic Test: Allows the panel to send panic zone test verification and failure results to the central station. Leaving this box empty instructs the panel to not send panic zone test results. The system test start, stop, panic zone verification, and panic zone failure messages sent to the central station and the trips count operation is the same as used under Walk test. See the XR500/XR500N Programming Guide (LT-0679) for additional information.

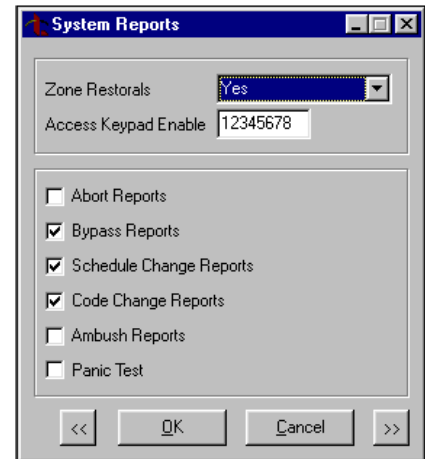

Power Fail Delay

Remote Link now allows the entry of two digits to accommodate Power Fail delays up to 15 hours on the XR500 and XR500N panels version 102 or higher.

The Power Fail Delay option tracks the duration of an AC power failure. When the AC power is off for the length of the programmed delay time, an AC power failure report is sent to the receiver. The delay time can be from 1 to 15 hours. Entering a zero sends the power failure report after a 15-second delay. The default setting is 1.

Version 1.16 Software Update

Effective the week of February 2, 2004 all Remote Link and System Link software are being shipped from the factory as version 1.16 (1/19/04) software. This version is an update from the 1.15 (12/15/03) software previously shipped and contains new features to the program.

Remote Link and System Link Updates version 1.16 (1/19/04) are available for download free of charge on the DMP Dealer Direct Website at <http://dmp.com/dealer>. If you are a current user of Remote Link, you will automatically be notified of this update. Hard copy updates on CD can be obtained by calling DMP Customer Service at 1-800-641-4282 and ordering the Link Update. The cost for each update is \$30.00.

