



XTLtouch



WITH AT&T OR VERIZON LTE

- ▶ 900 MHz Two-Way™ Wireless, Z-Wave®, and Wi-Fi built on board
- ▶ Designed for fast, reliable wireless installations
- ▶ Cellular and Wi-Fi communication to monitoring center
- ▶ 99 Two-Way, 900 MHz Wireless with up to 48 pre-named zones
- ▶ Supports up to eight Two-Way Wireless sirens, key fobs or outputs
- ▶ Remote panel updates via cellular or network
- ▶ Integrated proximity reader
- ▶ Brand with your dealer logo
- ▶ Weather forecast
- ▶ Responsive resistive touchscreen
- ▶ Up to seven additional wireless keypads
- ▶ Wall mount or desk stand

FEATURES

- ▶ 5-inch, full-color display
- ▶ Easy-to-use carousel menu
- ▶ Interactive shield for quick arming status
- ▶ All/Perimeter, Home/Sleep/Away or six Areas
- ▶ 99 four-digit user codes with authority levels
- ▶ 200-event memory
- ▶ Supports 140 Z-Wave® devices
- ▶ Keypad turns red in alarm conditions
- ▶ AC power and armed LED
- ▶ Door access can be added with the 734 module, 1134 wireless module or a DMP keypad with built-in proximity reader and relay
- ▶ Suitable for burglary and household fire applications
- ▶ Distinct fire, burglary, zone monitor and prewarn tones
- ▶ View system events/user activity through keypad display
- ▶ Supports “Is this a false alarm?” and Cancel/Verify™ features
- ▶ Built-in diagnostics for ease of service
- ▶ Unique silence feature allows the user to silence alarm bells and still keep the system armed
- ▶ Multiple chime sounds
- ▶ 26-character standard keyboard
- ▶ Remote control via Virtual Keypad™ or VirtualKeypad.com
- ▶ EASYconnect™ connection for the Virtual Keypad app when used with a Wi-Fi connection
- ▶ Arm only, ambush code and temporary user code options
- ▶ Built-in standby battery
- ▶ 50 Sensor Activity Zones
- ▶ Custom Actions



- ▶ Selectable automatic arming and disarming
- ▶ Open/Close schedules with Closing Check
- ▶ Late to Open/Early to Close and Traffic Count features for retail applications
- ▶ Programmable User Inactivity Monitor watches for on-site activity
- ▶ Remote program/download with Remote Link™, Dealer Admin™ or Tech APP™
- ▶ 16-character zone, user and area names
- ▶ XTLtouch™ uses cellular services from SecureCom Wireless™
- ▶ Auto WPS for Wi-Fi communication
- ▶ Add up to seven additional wireless 9800 Series™ keypads to the XTLtouch
- ▶ Wall bracket with internal level for ease of mounting

DEALER MANAGEMENT FEATURES

ONBOARD OPTIONS: CELLULAR AND WI-FI

The XTLtouch™ can be configured to use dual communication with Wi-Fi as primary and cellular as backup.

DIRECT DATA TRANSMISSION

The cellular communicators or Wi-Fi data network transmit messages directly from the panel to the monitoring center. All of the messages being sent by the control panel are received directly by a DMP monitoring center receiver. There are no intermediary servers or network operation centers and no retransmission or reinterpretation of the information over the internet. This ensures faster response and eliminates concerns about signals not being properly relayed or intermediate communication links failing.

RECEIVER 1 AND 2 OPERATION

Select one or two receivers for messages regarding alarms, supervisory/trouble, opening/closing and test reports. Send all messages to both receivers, identify one receiver for alarms and the second for reports or trouble messages to alert only the proper responder.

Receiver 2 can be used for dual reporting, or it can be used exclusively as a backup receiver. If programmed this way, Receiver 2 will start receiving messages when Receiver 1 fails and will continue until Receiver 1 returns to its normal state. When failing over to Receiver 2, the panel will notify you that it had to fail over.

ONBOARD WIRELESS

The XTLtouch control panel includes a high-gain wireless receiver on board supporting the 1100 Series™ wireless devices. These 900 MHz frequency-hopping, spread-spectrum devices feature two-way communication for superior operation, supervision and battery life. Two-way communication minimizes repetitive signaling and helps to quickly identify missing transmitters.

With 99 wireless zones, the transmitter options are more than sufficient for most installs. The XTLtouch's unique wireless features include motion detectors that are configurable over the air. Also included are eight keyfob zones or eight wireless outputs including arm/alarm LED, wireless sirens and wireless relays. All of these features make the XTLtouch a perfect choice for residential or small commercial applications.

HOME/SLEEP/AWAY

For residential applications, the homeowner can press one button to select each of three separate arming options. They can select Home to arm the perimeter of the home but allow for movement within the house. Select Sleep to arm the perimeter and only specified areas inside their home, leaving sensors near bedrooms disarmed. Selecting Away fully arms all elements of the system.

ALL/PERIMETER

In business applications, system users can quickly select All to completely arm the system as they leave the facility for the day. They also have the option to select Perimeter, arming all exterior sensors at doors and windows but disarming all interior sensors so employees can move freely inside the facility.

POWERING THE PANEL

The panel is powered by a small 12-volt plug-in or USB power supply. Standby battery is included.

1100T WIRELESS TRANSLATOR

The 1100T is the industry's only wireless translator listed and approved for life safety. Plus, it makes it easy to take over DSC, Interlogix, Honeywell 5800 and 2 GIG Series systems, all without replacing existing transmitters and sensors. To accommodate the maximum number of supported sensors on the XTLtouch, one 1100T can learn in 99 zones. It communicates to a DMP panel using the panel's built-in wireless receiver. This eliminates wiring and allows you to place the translator anywhere regardless of where the control panel is. With this one device, you can upgrade customers systems' to DMP quality, with software management tools, as well as online and app convenience and functionality without increasing installation costs.

FULLY SUPERVISED

You're kept fully informed of system status. The unit sends full reporting messages including zones, areas and users with all names and details included. Full supervision ensures that the cellular or network communication path is intact and functional.

ONE-STOP CELLULAR

SecureCom Wireless provides a reliable wireless solution for the XTLtouch transmission of alarm signals to the monitoring center receiver. See SecureComWireless.com for more information.

265LTE-V-TOUCH AND 265LTE-A-TOUCH

If your customer prefers the Wi-Fi only module, keep in mind, you can offer the flexibility of adding LTE cellular communication later. The 265LTE-V/A-Touch comes ready for activation with SecureCom Wireless and provides a fully supervised alarm communication path over Verizon's or AT&T's LTE network.

EASYCONNECT TECHNOLOGY

EASYconnect enables the control panel to establish an outbound connection to SecureCom over Wi-Fi. This allows for an effortless installation of network panels without any customer router programming, providing extremely quick app connection times.

FAST PROGRAMMING

Fast Programming lets your installers power through most programming data inputs and get jobs done faster. When the panel programming defaults are acceptable for installation and only basic programming options are needed, Fast Programming allows the technician to quickly enter information without navigating all of the programming menus.

- ▶ Receiver IP
- ▶ Weather Zip Code
- ▶ System (Area, A/P or H/S/A)
- ▶ Hours from GMT
- ▶ Wireless Siren Serial Number
- ▶ Zone Information

All standard programming options are still available in the programming menu from the keypad, Tech APP, Dealer Admin or Remote Link.

AUTO WPS


The XTLtouch control panel provides the ability to connect to a Wi-Fi network easily with the Auto WPS feature. Once the XTLtouch is powered on, users press the WPS button on the router to connect the XTLtouch to the Wi-Fi network automatically. If Auto WPS is unavailable, the list of available Wi-Fi networks will pop up on the keypad to manually select the preferred network.

BUILT-IN PROGRAMMER

An internal English-text programmer enables technicians to easily program and test the panel from any keypad. A lockout code restricts access to only authorized persons.

REMOTE PROGRAMMING

Remotely program panels using the Tech APP, Remote Link or Dealer Admin. Retrieve panel programming, make the necessary programming change and then send the revised programming into the panel.

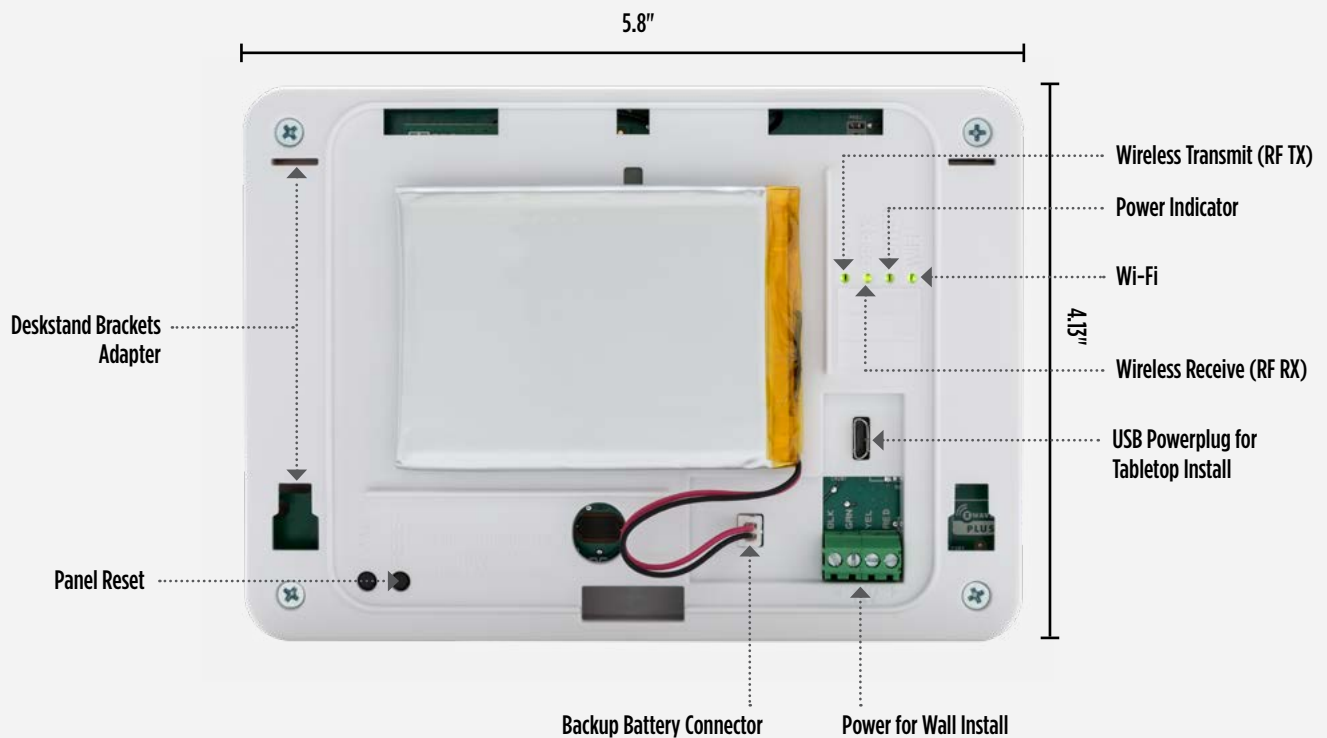



END USER MANAGEMENT FEATURES

SIMPLE ARMING

XTLtouch provides multiple arming configurations: Area arming with six separate areas; All/Perimeter arming with perimeter and interior areas; or Home/Sleep/Away arming with perimeter, interior and bedroom areas. Users can arm the perimeter and interior at night while leaving the bedroom area disarmed.

ENTRY CHECK-IN PROTECTION

With DMP's patented Entry Check-In Protection, your system still works even if the panel is destroyed. Entry Check-In Protection is a proactive safeguard against a burglar's fast tactic to disable the security system before it can send an emergency signal. Specifically, if an entry zone is triggered, and the system is not disarmed in the designated delay timeframe, a trouble signal will be immediately generated at the monitoring center.

Z-WAVE SUPPORT

Add up to 140 Z-Wave devices for mobile control of lights, locks and thermostats. Up to 20 Favorites allow users to program multiple devices to respond to a single command or panel events like arming and disarming. Z-Wave devices can be controlled with Virtual Keypad.

VIRTUALKEYPAD.COM

Users can access their security systems via internet connection on a tablet or computer. Customers log in to VirtualKeypad.com with their logins and system user codes.

VIRTUAL KEYPAD APP

This app provides users with the ability to access a number of system functions remotely via a cellular or Wi-Fi connection. For you as their dealer, the app provides the opportunity to use your company logo. The Virtual Keypad app offers the following features:

- ▶ System arming/disarming
- ▶ All/Perimeter, Home/Sleep/Away or multi-area operation
- ▶ Panel output status and control
- ▶ Control of Z-Wave thermostats, lights, locks and garage door
- ▶ Favorites (control multiple Z-Wave devices with a single button)
- ▶ Actions allow users to associate Favorites to activate specific events
- ▶ Program a picture (user takes) of a room with hotspots to control Z-Wave devices
- ▶ Real-time weather for your local zip code
- ▶ Sensor activity zone setting
- ▶ View live video and clips from cameras
- ▶ Geofencing
- ▶ User code management includes the ability to add, delete or edit users from the system
- ▶ Push notifications and view history of alarm events, arming/disarming and troubles by other users on the system

CUSTOM ACTIONS

In addition to controlling lights, locks and thermostats, users can also take advantage of up to 20 customizable actions that can be programmed into the XTLtouch. Now users can select a combined sequence of actions, all based on specific Favorites, lights and locks to activate or deactivate Z-Wave devices, Favorites or outputs during specific times and days or specific zone trips.

50 SENSOR ACTIVITY ZONES

The XTLtouch greatly expands customers' remote access to their homes and businesses through their Virtual Keypad app. Customers who use the app to control their systems can receive reports from up to 50 night or exit type zones as activity occurs on their systems.

ADDITIONAL WIRELESS KEYPADS

The 9800 Series wireless keypads are fully functioning, supervised keypads that provide installation flexibility. Add up to seven additional wireless 9800 Series keypads to the XTLtouch.

FALSE ALARM FEATURES

To reduce false alarms, Cancel/Verify and False Alarm Question prompt users to validate whether an alarm has occurred after entering their code. In a Home/Sleep/Away or All/Perimeter system, the user can either press Verify or Yes to manually confirm a valid burglar alarm, and an alarm is then sent to the monitoring center.

USER CODES

Program up to 99 codes. Assign a Standard or Master Authority level to scheduled and limited users to control their level of access to the system.

EVENT MEMORY

The XTLtouch logs up to 200 user and system events that can be viewed at any time with the keypad User Menu option. The Display Events feature allows users to view stored events such as openings and closings, zone events, user code changes and supervisory events.

ZONE INACTIVITY

With Zone Inactivity, you can easily monitor a person living alone. If there is no activity at the premises within the programmed number of hours, the monitoring center receives an alert. It's a valuable feature for customers looking after elderly adults.

ZONE AUDIT

The Zone Audit feature allows programming the panel to send an alert when the sensor fails to trip within the specified number of days. This feature helps identify potential sensor problems, including sensors deactivated to bypass faults or blocked sensors.

KEYPAD DISPLAY

Screen brightness, tone (frequency) and volume of keypad touches can be adjusted easily. Simply tap the desired function, then tap the plus or minus buttons to increase or decrease each of the settings.

CUSTOMIZE YOUR DISPLAY

Insert a standard Micro SD card in the keypad slot to transfer and display your dealer logo and profile information on the keypad. When pressed, your logo provides your dealer contact information.

SHIELD DISPLAY

Basic arming and disarming has never been easier with the interactive shield icon displayed in the center of the keypad. The shield icon can perform many functions:

It shows the arming status of the system at a glance. The shield's animated border will be a solid blue when armed, and the interior will display the type of arming: All, Perimeter, Home, Sleep or Away. Area modes are also supported. When disarmed, the area will be transparent with the exception of an outline of the shield.

The shield also allows for quick arming. When the user presses and holds the shield for two seconds, the system quick arms.

The shield also provides standard arming and disarming options. When arming, the exit timer provides a countdown for the programmed amount of time the user has to exit. The timer provides both a visual and audible notification to exit.

RED KEYPAD

During an alarm state, the keypad screen turns red. The entry tone that users are accustomed to hearing is also distinctly different. This allows the user to instantly recognize an alarm condition, even if the siren has been silenced. The screen remains red until reset by the user.

CUSTOMIZABLE CAROUSEL MENU

The carousel menu on the main screen offers common functions such as Panic, Chime, Check-in, Reset, Options and Easy Exit™. With a customizable carousel, there's no need to scroll through the options you don't want to use. Simply turn off those options, and only the ones you care about are displayed.

Panic keys are part of the carousel menu; once pressed, three icons will appear: Police, Emergency and Fire. Easy Exit is only available while the system is armed. Traditional DMP shortcut keys will also work in the keypad screen.



Arming: Tapping the shield displays an arming options screen.

Arming: Press the shield for two seconds, and the system quick arms and starts the exit timer, giving you plenty of time to leave.

Disarming: Press the shield for two seconds, and the keypad screen asks you to enter your code to disarm.

Enter code: When you open an entry door, the keypad screen asks you to enter your code to disarm.



ATTENTION LIST

After disarming, if an alarm on any zone or communication problem has occurred while armed, the main screen may display a yellow attention list icon at the top of the screen. When touched, the attention list displays the zone and event.

WEATHER INFORMATION

Up-to-date weather information for today and tomorrow displays on the bottom left of touchscreens that are installed with network or cellular connected panels. Network and cellular connected panels will also display the current temperature. If the panel is not capable of supporting weather, the space will be blank. Eight icons are available to indicate the weather: Sunny, clear, p-cloudy, cloudy, rainy, snowy, stormy and foggy.

CODELESS OPERATION

The built-in proximity reader operates with a variety of credentials, including cards, fobs and the DMP ProxPatch™, a small, adhesive “button” that users can attach to a wallet, phone or other item they usually carry with them. A confirmation tone sounds when the credential is recognized and accepted.



COMPATIBILITY REFERENCE SHEET

Keypads

- 9060-W Wireless Keypad
- 9060-W/699 Wireless Keypad with Deskstand
- 9063-W Wireless Keypad with Prox Reader
- 9063-W/699 Wireless Keypad with Prox Reader and Deskstand
- 9862USB-B Wireless Graphic Touchscreen Keypad with Micro-USB
- 9862USB-W Wireless Graphic Touchscreen Keypad with Micro-USB
- 9862-W Wireless Graphic Touchscreen Keypad
- 9862-B Wireless Graphic Touchscreen Keypad

Monitoring Center Receivers

- SCS-IR Security Control Receiver
- SCS-VR Software Receiver

Dealer Management

- Remote Link Programming Software
- Dealer Admin

End User Management

- VirtualKeypad.com
- Virtual Keypad



DMP Wireless

- 1100R Repeater
- 1100T Translator
- 1101 Universal Transmitter Internal and External Contacts
- 1102 Universal Transmitter External Contact
- 1103 Universal Transmitter Internal and External Contacts
- 1106 Universal Transmitter Internal and External Contacts
- 1107 Micro Window Transmitter
- 1108 Doorbell Module
- 1114 Four-Zone Expander
- 1115 Temperature Sensor and Flood Detector
- 1115-W/T280R Temp Sensor/Flood Detector and Temp Sensor Probe
- 1115-W/470PB Temp Sensor/Flood Detector and Water Sensor Probe
- 1116 Relay Output
- 1117 LED Annunciator
- 1119 Door Sounder
- 1122 PIR
- 1126R 360 Ceiling Mount PIR
- 1127C Wall Mount Curtain PIR
- 1127W Wall Mount Wide Angle PIR
- 1128 Glassbreak Detector
- 1131 Recessed Contact
- 1132 Recessed Contact
- 1134 Access Control Module
- 1135 Siren

- 1136 Remote Chime
- 1137 LED Emergency Light
- 1139 Bill Trap
- 1141 Wall Button
- 1142 Two-Button Holdup Transmitter
- 1142BC Two-Button Belt Clip Holdup Transmitter
- 1144-4 Four-Button Key Fob
- 1144-2 Two-Button Key Fob
- 1144-1 One-Button Key Fob
- 1144-1P One-Button Key Fob with ProxPatch
- 1144-D Dual-Button Key Fob
- 1148 Personal Pendant
- 1154 Four-Zone Input Module
- 1158 Eight-Zone Input Module
- 1164NS Smoke Detector with No Sounder
- 1164 Smoke Detector with Synchronized Sounder
- 1166 Smoke Ring
- 1168 Smoke/CO/Low Temp Detector
- 1183-135F Heat Detector, Fixed
- 1183-135R Heat Detector, Rate of Rise
- 1184 Wireless Carbon Monoxide Detector

Digital Cellular Communicator

- 265LTE-V-Touch Verizon LTE Cellular Communicator, XTLtouch
- 265LTE-A-Touch AT&T LTE Cellular Communicator, XTLtouch



COMPATIBILITY REFERENCE SHEET

Encrypted Wireless Models

1101E	Universal Transmitter
1103E	Commercial Universal Transmitter
1106E	Universal Transmitter
1135E	Siren
1142E	Two-Button Holdup Transmitter
1144E	Key Fob
1144-2E	Two-Button Key Fob with Encryption
1144-4E	Four-Button Key Fob with Encryption

Z-Wave

Z-14319	In-Wall Toggle Switch
Z-52190	Light Bulb
Z-98880-004	Door Deadbolt, Satin Nickel
Z-98880-005	Door Deadbolt, Venetian Bronze
Z-98880-006	Door Deadbolt, Polished Brass
Z-99100-STAND	Demo Deadbolt Desk Stand
Z-GD00Z	Garage Door Controller
Z-PD300EMZ5-1	Smart Light Control Module with Dimmer
Z-PS15EMZ5-1	Smart Appliance Control Module
Z-TBZ500	Thermostat

Accessories

9800-STAND-B	Deskstand for 9800 Keypads
9800-STAND-W	Deskstand for 9800 Keypads
V-IP1006RR	Wireless Access Point

Proximity Credentials

1306P	Prox Patch
1326	Proxcard II Card
1346	ProxKey III Access Device
1351	ProxPass
1386	IsoProx II Card
PSC-1/10	Standard Light Proximity Card, 10 Pack
PSC-1/100	Standard Light Proximity Card, 100 Pack
PSC-3/100	Proximity Key Ring Tag, 100 Pack
PSK-3/10	Proximity Key Ring Tag, 10 Pack
PSM-2P ISO/10	Imageable Proximity Card, 10 Pack

Specifications

Operating Voltage	12 VDC
Dimensions	5.8" W x 4.1" H x 1.3" D
Display Type	Full-color graphic LCD
Display Size	5.0" (15:9 diagonal)
Color	Gloss White

Primary Power:

12 VDC (Model 372-500-W or 371-1000U-W)

Secondary Power:

3.8 VDC Lion Polymer Battery	
XTLtouch4800/8	XTLtouch Replacement 4800MAH Battery, 8 pk
XTLtouch800/8	XTLtouch Replacement 800MAH Battery, 8 pk

Ordering info

XTLtouch-LA	XTLtouch AT&T LTE
XTLtouch-LV	XTLtouch Verizon LTE
XTLtouchF-LV	XTLtouch Verizon with Wi-Fi, Z-Wave and LTE
XTLtouchUSB-LA	XTLtouch AT&T LTE with USB
XTLtouchUSB-LV	XTLtouch Verizon LTE with USB
XTLtouch	XTLtouch with Wi-Fi

Certifications

FCC Wireless Receiver and Z-Wave Approvals
 FCC ID: CCKPC0199
 IC: 5251A-PC0199

FCC Wi-Fi Network Approvals
 FCC ID: VW4-ATWINC1500
 IC: 20266-WINC1500PB

FCC LTE Cellular Communicators
 FCC Part 15 ID: XMR201707BG96
 XMR201909BG95

Intertek (ETL) Listed
 ANSI/UL 1023 Household Burglar
 ANSI/UL 1610 Central Station Burglar
 ANSI/UL 985 Household Fire

For additional information, go to DMP.com/Compliance.

800-641-4282 | DMP.com
 2500 N. Partnership Blvd, Springfield, MO 65803
 Designed, engineered & manufactured in Springfield, MO using U.S. & global components

Any third-party trademarks referenced herein are the property of their respective owners and do not indicate or imply any affiliation, sponsorship or endorsement of DMP or its products.