

## Remote Link and System Link

April 2015

### Version 1.74 Software Update

Effective April 16, 2015, all Remote Link and System Link software is being manufactured as Version 1.74 (4/14/15). If your current Remote Link or System Link software is previous to Version 1.46, update to Version 1.59 before updating to 1.74 (4/14/15).

### Features


#### Traffic Count

XR150/XR350/XR550 Series Control Panels operating with Version 109 or higher firmware now support Traffic Count. A new Traffic Count option is available for Night (NT) and Exit (EX) type zones just after Zone Real-Time Status in Zone Information programming. The panel reports the number of zone trips to the Central Station receiver at the time the system is armed.

#### Virtual Keypad Apps - iOS/Android

To allow App users to view the TRAFFIC COUNT screen from the Virtual Keypad™ App enable Traffic Count from the [vk.securecomwireless.com](http://vk.securecomwireless.com) website. The Traffic Count Screen is compatible with XT/XTL Series operating with Version 122 or higher firmware or XR150/XR350/XR550 Series control panels operating with Version 109 or higher firmware. See the following Virtual Keypad App Technical Updates for more information:

- Android Version 4.4 (TU-0781)
- iOS Version 4.5 (TU-0782)
- XT Series Version 122 (TU-0779)
- XR150/XR350/XR550 Version 109 (TU-0780)

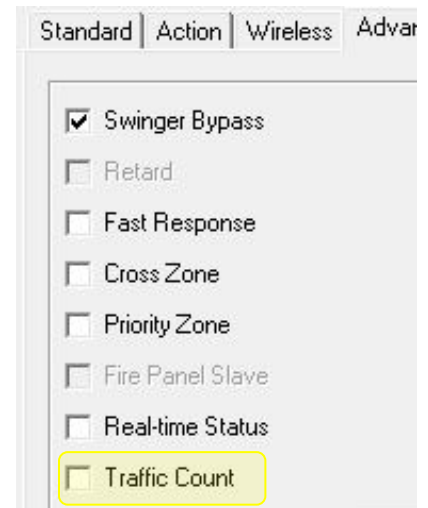

Remote Link  
Zone Information

### Updated Operation

#### Verizon MEID Status

Occasionally, Remote Link Version 1.73 (3/16/15) retrieved the incorrect status from Verizon for MEIDs activated for the first time. This would cause incorrect status information to be displayed for the MEID in the SecureCom Wireless Activations Window. Remote Link Version 1.74 (4/14/15) retrieves the correct status for each MEID.

#### Obtaining the New Software

Remote Link and System Link Version 1.74 (4/14/15) updates are available for download free of charge on the DMP Dealer Direct Website at <http://dmp.com/dealer>.