
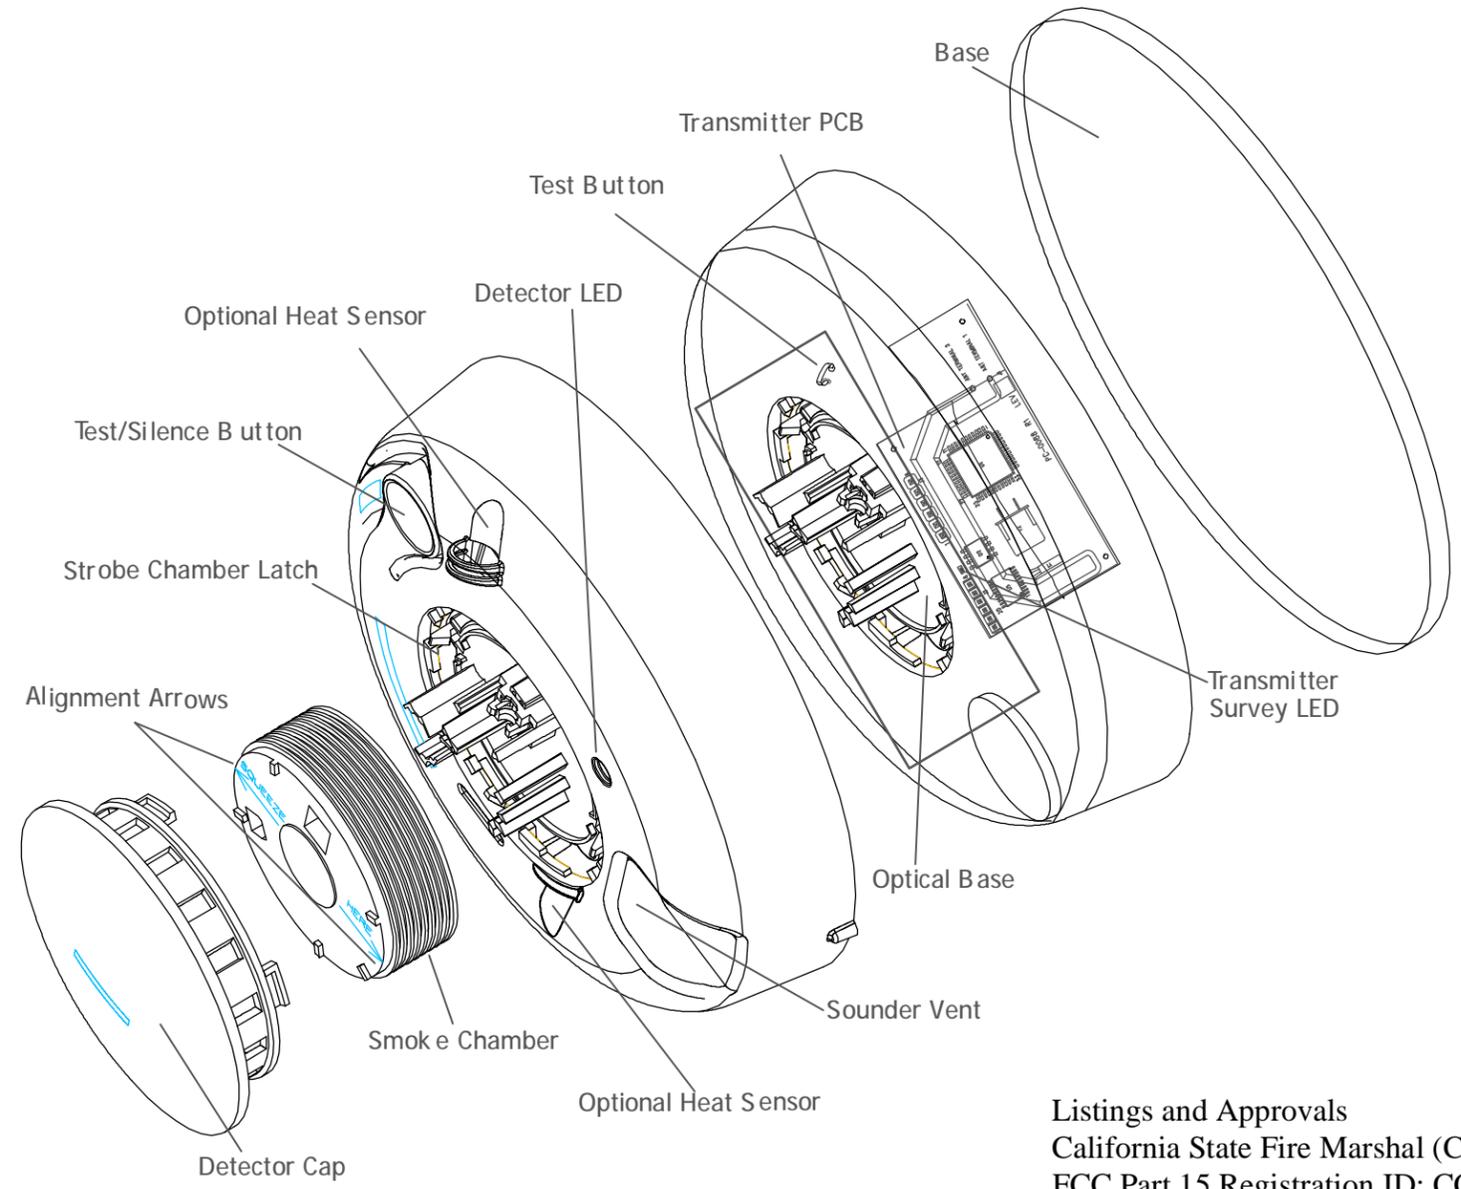


1161/1162 Residential Wireless Detectors

Description:

The Model 1161 Smoke Detector with Sounder, and 1162 Smoke/Heat Detector with Sounder are residential wireless detectors used with DMP Wireless. Model 1162 also offers a built-in fixed and rate-of-rise heat detector.

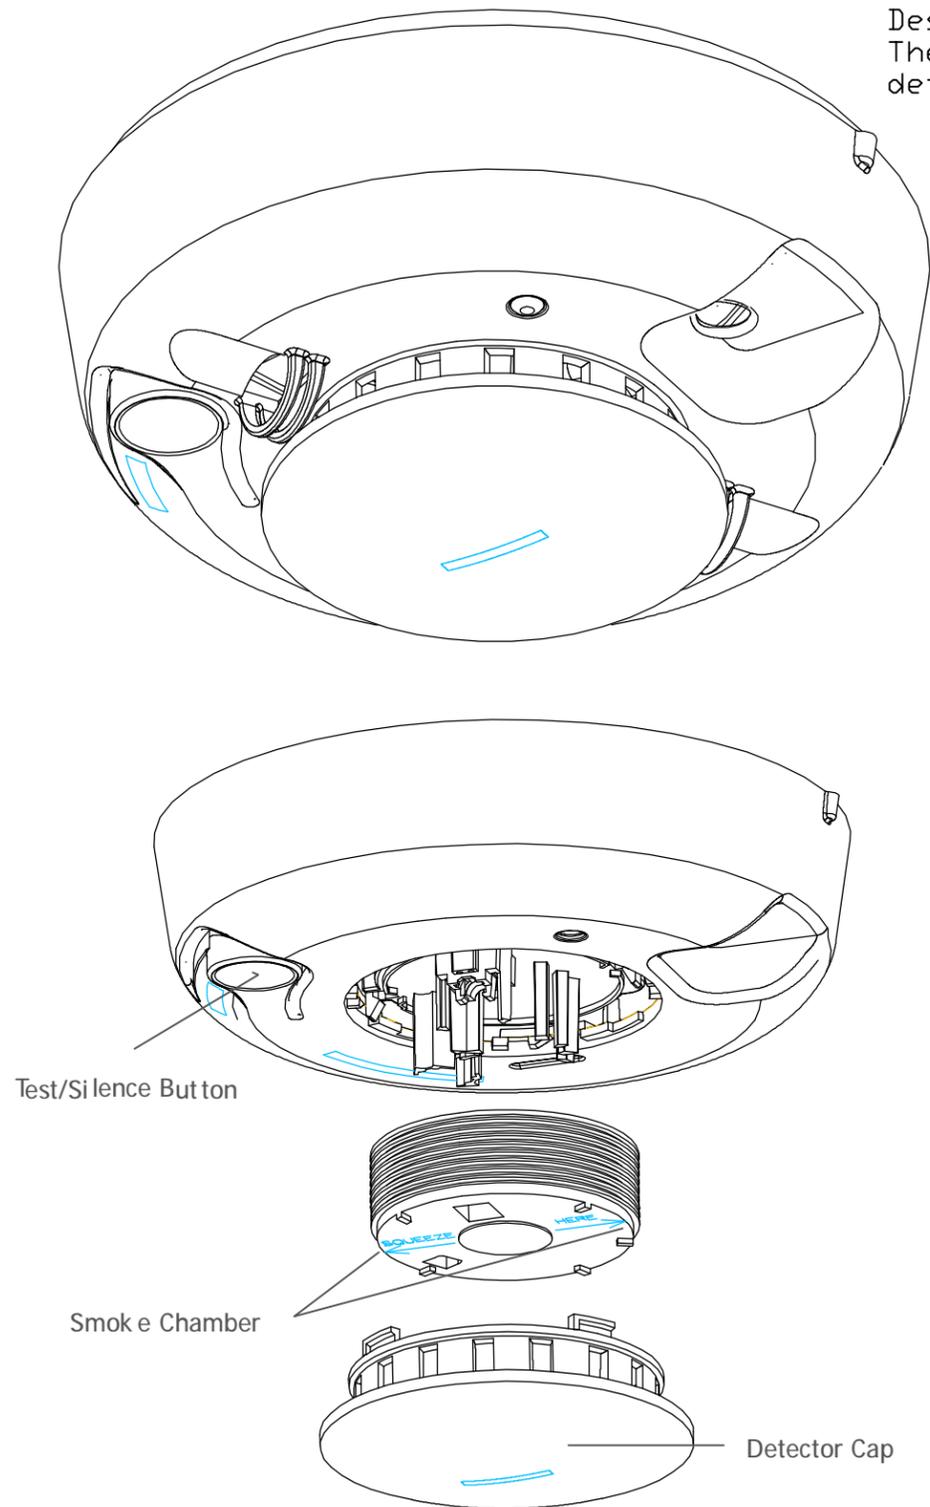

Specifications

Battery
 Life Expectancy At least 1 year (normal operation)
 3.0V Lithium Panasonic CR123A or DMP CR123-Fire
 See Battery Life Expectancy for full details.
 Low battery
 Threshold signal 2.70V
 Beep rate 1 every 30 sec. ± 2 sec.
 Sounder pattern
 Temporal 85dBa at 10'
 Sensitivity 2.3% ±0.8%
 Frequency Range 903 - 927 MHz

Dimensions

Detector 5.6" x 2.4"
 (14.3cm x 6.1cm)
 Base 5.4" x 0.46"
 (13.7cm x 0.46cm)
 Heat alarm specifications:
 Rate-of-rise 15°F/min > 105°F
 (8.3°C/min > 40.6°C)
 Fixed 135°F ± 5°F
 (57.2°C ± 2.8°C)
 Drift compensation
 adjustment 0.5%/ft. max.
 Color White

Listings and Approvals

California State Fire Marshal (CSFM)
 FCC Part 15 Registration ID: CCKPC0088
 IC Registration ID: 5251A-PC0088
 Underwriters Laboratories (UL) Listed
 ANSI/UL 268 Smoke-Automatic Fire Detectors

Architects and
 Engineers
 CAD Drawings



Digital Monitoring Products
 2841 E. Industrial, Springfield, MO 65802

FILE NAME	TITLE	
DRAWN LK	DATE 09-09-09	1161 Residential Wireless Smoke Detector
CHECKED	SCALE NTS	PART NO. REV.
APPR'VD	SHEET 1 OF 1	