

7800 Series Graphic Keypads

June 2014

Version 105 Software Update


Effective June 20, 2014, all 7800 Series Graphic Keypads will be manufactured with updated Version 105 (6/10/14) software. Version 105 (6/10/14) will begin shipping as current inventory of 7800 Series keypads are depleted which is expected to occur at the end of June.

Features

Spanish Language Support

7800 Series Graphic Keypads can now be programmed to display Spanish text in the Home Screen and screens accessed from the Carousel Menu. A new Select Language screen has been added to the Installer Options menu just after Shortcut Items.

To display the panel User Menu, Status List and panel events in Spanish, program the panel's System Options User Menu and Status List Language as Spanish.

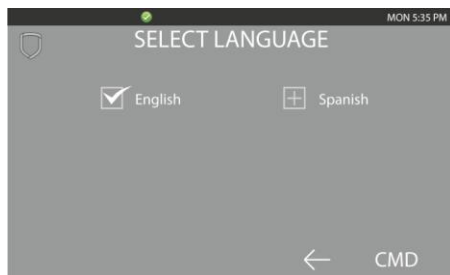

Select Language Screen

The Select Language screen allows you to select the language for text on the Home Screen and Carousel Menu Screens. Press the item to select and a check mark displays. Press again to de-select. The keypad does not translate information from the panel displayed in the Keypad screen such as the Status list. Only one language may be selected. Default is English.

Updated Operation

Display Timing

7800 Series Graphic Keypad Version 105 (6/10/14) corrects two exit delay countdown timing issues.

Previously for All/Perimeter or Home/Sleep/Away systems, the Interactive Shield icon of the Home Screen could not be used to arm the system after the following steps occurred:

1. The system had been armed starting the exit delay countdown.
2. An exit type zone was tripped just as the exit delay countdown ended.
3. The entry delay started before the keypad could return to the Home Screen after the exit delay.
4. A user code was entered to disarm.

This issue did not occur on Area systems.

Proper operation was restored to the Interactive Shield icon after the system was armed using the Carousel menu Keypad icon or the system was armed from another keypad.

Also for All/Perimeter or Home/Sleep/Away systems, the Zone Monitor Alert window could have not cleared from the display after the following steps occurred:

1. The system was armed.
2. An exit type zone was tripped starting the Entry Delay and displaying ENTER CODE: - on the keypad.
3. A user code was entered to disarm.
4. Before ALL SYSTEM OFF was displayed, a zone with Zone Monitor enabled was tripped causing the Zone Monitor Alert to display.

This issue did not occur on Area systems.

Proper operation was restored after a keypad power cycle.


Exit Delay

When a system with more than four keypads was armed, the display of the exit countdown on the 7800 Series Graphic Keypad may have been delayed by approximately 30 seconds. The exit countdown now displays on the keypad within 5 seconds.

Obtaining the New Software

To update to the latest software, return the 7800 Series Graphic Keypad to DMP and simply indicate "Update to latest software" of the 6-digit Repair Authorization tag. If you need Repair Authorization tags contact DMP Customer Service at 1-800-641-4282.

TU-0732 © 2014 Digital Monitoring Products, Inc.

	800-641-4282	INTRUSION • FIRE • ACCESS • NETWORKS
	www.dmp.com	2500 North Partnership Boulevard
	Designed, Engineered and Assembled in the USA	Springfield, Missouri 65803-8877