



V-5052D INDOOR/OUTDOOR FIXED DOME CAMERA

Dimensions: 4.9" H × 2.9" W

- ▶ 2.1 megapixel resolution with IR LEDs for no/low light imaging at up to 50 feet

V-5054D INDOOR/OUTDOOR FIXED DOME CAMERA

Dimensions: 4.9" H × 2.9" W

- ▶ 4 megapixel resolution with IR LEDs for no/low light imaging at up to 50 feet

V-5012B INDOOR/OUTDOOR BULLET CAMERA

Dimensions: 6.41" H × 2.64" W

- ▶ 2 megapixel resolution with IR LEDs for no/low light imaging at up to 50 feet

V-5014B INDOOR/OUTDOOR BULLET CAMERA

Dimensions: 6.41" H × 2.64" W

- ▶ 4 megapixel resolution with IR LEDs for no/low light imaging at up to 50 feet

V-4052D INDOOR/OUTDOOR FIXED DOME CAMERA

Dimensions: 4.4" Dia × 3.2" H

- ▶ 2.1 megapixel resolution with IR LEDs for no/low light imaging at up to 30 meters

V-4022C INDOOR CUBE PIR CAMERA

Dimensions: 4.1" H × 2.6" W × 1.3" D

- ▶ 2 megapixel resolution with PIR detection and IR LEDs for no/low light imaging at up to 10 meters

V-4072MD INDOOR/OUTDOOR MINI DOME CAMERA

Dimensions: 4.3" H × 2.2" W

- ▶ 2 megapixel resolution, IR LEDs for no/low light imaging at up to 10 meters

V-IP1006RR WIRELESS ACCESS POINT

Dimensions: 1.4" H × 7.1" W × 4.9" D

SecureCom video



FEATURES

- ▶ Install ethernet or Wi-Fi connected cube camera and Mini Dome
- ▶ Manually initiate recording of video from VirtualKeypad.com or Virtual Keypad™ app
- ▶ Continuous video recording using the eight-channel network video recorder (NVR)
- ▶ Users can select any of the cameras remotely to view or capture video via the Virtual Keypad app or VirtualKeypad.com
- ▶ Cloud storage of clips for easy off-site archiving
- ▶ Download clips to smartphone to quickly forward as needed
- ▶ PoE (Power-over-Ethernet) for easy installation and reliability
- ▶ Allows residential users to remotely look in on children or seniors
- ▶ Allows commercial users to observe employee activities, monitor certain areas or entrances
- ▶ Video verification available via Virtual Keypad app and the monitoring center automation software
- ▶ Exclusive EASYconnectVPN™ for encrypted connectivity



DMP.COM



@DMPALARMS

VIDEO PRODUCTS

Video cameras connected to residential and commercial security systems give users a powerful security tool. With cameras, businesses and homeowners can check in on their premises at any time, as well as be prompted to determine the situation upon an alarm in the event of an intrusion. Monitoring center operators can also assess the premises upon an alarm as live video and recorded clips are available immediately at the monitoring center.

Virtual Keypad app users will receive real-time alarm notification on their mobile devices. Users can immediately cancel or verify the alarm from the same app screen that shows live-camera views from the premises or pre-alarm and post-alarm recorded clips.

CAMERA OPTIONS

Select from a range of wireless or wired IP cameras to meet the needs of each installation. Cameras are available in a variety of models including cube, dome and bullet.

All cameras include infrared operation in low/no ambient light.

IMAGE CAPTURE OPTIONS

Users have the option not only to view the cameras attached to their system, but also to record video to document activity at their premises via the Virtual Keypad app or VirtualKeypad.com. All cameras can be programmed to automatically record 20-second video clips when motion is detected.

Users can opt to receive an email with the video clip any time a recording is made and view the clip via the app or download it to their smartphones.

RECORDER OPTIONS

Record and access video images using existing IP cameras through the network video recorder (NVR).

ADD-ON SALE

Video capability is a much-desired, value-added capability for your customers' systems. DMP forward/backward compatibility ensures that you can easily add cameras to existing systems as well as include them in new systems.

TRUE WIDE DYNAMIC RANGE


With True Wide Dynamic Range you get a clearer image in situations where you have an area brighter than other areas of the image.

VIDEO VERIFICATION

DMP surveillance solutions include significant enhancements in video verification, which provides the added benefit of visual information that is sent with alarm notifications to a monitoring station. As a result, operators can view the footage right away and determine whether the trigger is a false alarm or worthy of a police dispatch.


At the same time, users can also receive video verification on any alarm triggered into a DMP panel, which they can easily monitor and manage from anywhere via VirtualKeypad.com or the Virtual Keypad app. As a result, they can ensure police and/or fire departments are dispatched to a "real" alarm, plus they can prevent being assessed heavy fines for false alarms.

Video verification can be integrated into virtually any modern monitoring center automation software simply and easily. There is no expensive or arduous integration process required.

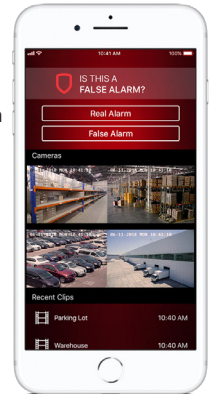

EASYCONNECTVPN FOR UNRIVALED SECURITY AND PRIVACY

A virtual private network (VPN) is one of the most essential tools, not only for businesses but also homeowners. Using a VPN ensures that live video sent to SecureCom servers™ via the internet remains private — that's because it encapsulates and encrypts the traffic before it's sent over the internet. EASYconnectVPN is the private firmware exclusively for SecureCom Wireless and DMP and is standard protocol, not only for SecureCom cameras and NVRs, but also some compatible Digital Watchdog® cameras.

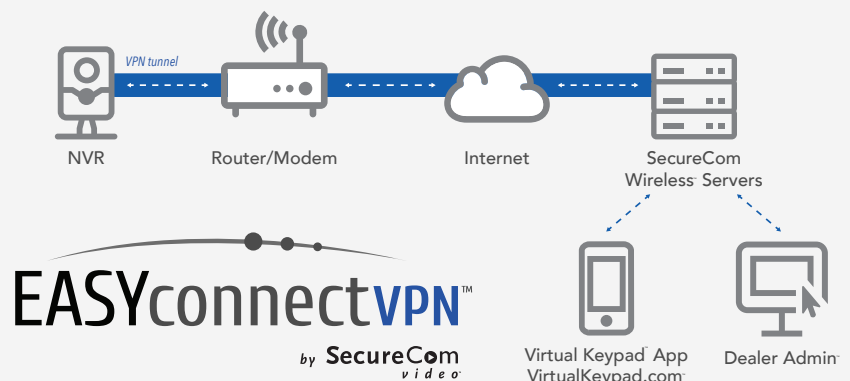

INDOOR/OUTDOOR FIXED DOME CAMERA

The V-5052D has 2.1 megapixel resolution, 4 mm focal length and IR LEDs for no/low light imaging at up to 50 feet.

The V-5054D has 4 megapixel resolution, 4 mm focal length and IR LEDs for no/low light imaging at up to 50 feet.



INDOOR/OUTDOOR BULLET CAMERA

The V-5012B has 2 megapixel resolution, 4 mm focal length and IR LEDs for no/low light imaging at up to 50 feet.

The V-5014B has 4 megapixel resolution, 4 mm focal length and IR LEDs for no/low light imaging at up to 50 feet.



INDOOR/OUTDOOR FIXED DOME CAMERA

The V-4052D has 2.1 megapixel resolution, 2.8 mm focal length and IR LEDs for no/low light imaging at up to 30 meters.



INDOOR CUBE CAMERA

The V-4022C has 2 megapixel resolution, 2.8 mm focal length, Wi-Fi and IR LEDs for no/low light imaging at up to 10 meters.



INDOOR/OUTDOOR MINI DOME CAMERA

For Wi-Fi capabilities, choose Model V-4072MD with 2.1 megapixel resolution, and IR LEDs for no/low light imaging at up to 10 meters. It can also be powered with hardwired network and is PoE (Power over Ethernet) compatible.



SECURECOM CAMERA MOUNTING PLATE

White steel camera mounting plate for use with electrical single gang boxes and the SecureCom dome camera.



NETWORK VIDEO RECORDER

The DMP V-4408D NVR works hand-in-hand with Virtual Keypad Access to expand storage and manipulate multiple cameras. The NVR has ports for up to eight networked cameras and can store up to 2 terabytes of video. You can access that video from the NVR or directly from the Virtual Keypad app or VirtualKeypad.com. It's fast and simple to view security footage in live view. You can also easily download and export clips to other devices locally via a USB drive.

Supporting ONVIF® and SecureCom video cameras, our PoE NVR can be installed to fit most any need.



WIRELESS ACCESS POINT

This high-speed wireless access point (V-IP1006RR) comes pre-configured for easy set up with SecureCom cameras. It offers 300 Mbps wireless speed, supports multiple operation modes, PoE, WPA and WPA2. WPS encrypted connection can be set up with a single-button push. Up to 100-foot range.



SPECIFICATIONS

Camera Specifications**V-4022C Indoor Cube Camera**

Dimensions 4.1" H × 2.6" W × 1.3" D

V-4052D Fixed Dome Indoor/Outdoor Camera

Dimensions 4.4" Dia × 3.2" H

V-4072MD Indoor/Outdoor Mini Dome Camera

Dimensions 4.3" Dia × 2.2" H

V-5012B/V-5014B Bullet Indoor/Outdoor Camera

Dimensions 6.4" H × 2.65" W

V-5052D/V-5054D Fixed Dome Indoor/Outdoor Camera

Dimensions 4.9" H × 2.9" W

Accessories Specifications**V-4408D Eight-Channel NVR**

Dimensions 12.4" H × 15.2" W × 2.0" D

V-IP1006RR Wireless Access Point

Dimensions 1.4" H × 7.1" W × 4.9" D

V-4000-PLATE-1 SecureCom Camera Mounting Plate

Dimensions 5.3" Dia × 0.2" H

Country of Origin

V-4022C Made in China

V-4052D Made in China

V-4072MD Made in China

V-5012B/V-5014B Made in Vietnam

V-5052D/V-5054D Made in Vietnam

Optional Accessories Available in Distribution**4000 Series**

WMS	Wall Mount Short
CPM	Ceiling Pendant Mount
PC120	120mm Pendant Cap
CB120	Conduit Base
CM	Corner Mount
SRSM	Medium Sun and Rain Shield

5000 Series

DWC-VFZCM	Ceiling Mount Bracket
DWC-GPLT	Converter Plate for Electronic Gang Box - Ivory
DWC-GPLT-W	Converter Plate for Electronic Gang Box - White
DWC-V1CNM	Corner Mount Bracket for Outdoor Dome Cameras
DWC-VFZJUNC	Junction Box for Outdoor Dome Cameras
DWC-PMB-WL	Pole Mount Bracket for Outdoor Dome Cameras (V-5054D Only)
DWC-VFZWMM	Wall Mount Bracket for Outdoor Dome Cameras

Stand-alone — Use with any DMP control panel or any other control panel when a DMP DualCom, CellComLTE or iComSL™ is installed. For use with Virtual Keypad app or VirtualKeypad.com.

800-641-4282 | DMP.com
2500 N. Partnership Blvd, Springfield, MO 65803

LIMITED WARRANTY: DMP warrants that the products manufactured by DMP shall be free from defects of manufacture, labeling, and packaging for a period of three (3) years from the invoice date to the original Buyer, provided that representative samples of the defective products are returned to DMP for inspection...To read the full DMP Limited Warranty, go to DMP.com/Warranty or check the DMP Price List or Catalog.