


Description
The Model 1181 PIV is a weather proof and tamper resistant wireless switch for monitoring the open position of fire sprinkler control valves of the post indicator, butterfly and other types. The 1181 is compatible with the XR100 and XR500 Series panels using an 1100X Wireless Receiver. The contact operates the external contacts of the wireless transmitter when the valve position is altered from an open state. The 1181 mounts in a 1/2" tapped hole in the post indicator or butterfly valve housing. Install where the 1181 is accessible for service.



Specifications
Battery
Life Expectancy 5 years (normal operation)
Type 3.0V lithium CR123
See Battery Life Expectancy for full details.
Frequency Range: 903-927 MHz
Operating Range: -10°F to 120°F
Dimensions
4.75"L x 2.25"W x 5.08"H
Compatibility
1100X Wireless Receiver

Architects and
Engineers
CAD Drawings

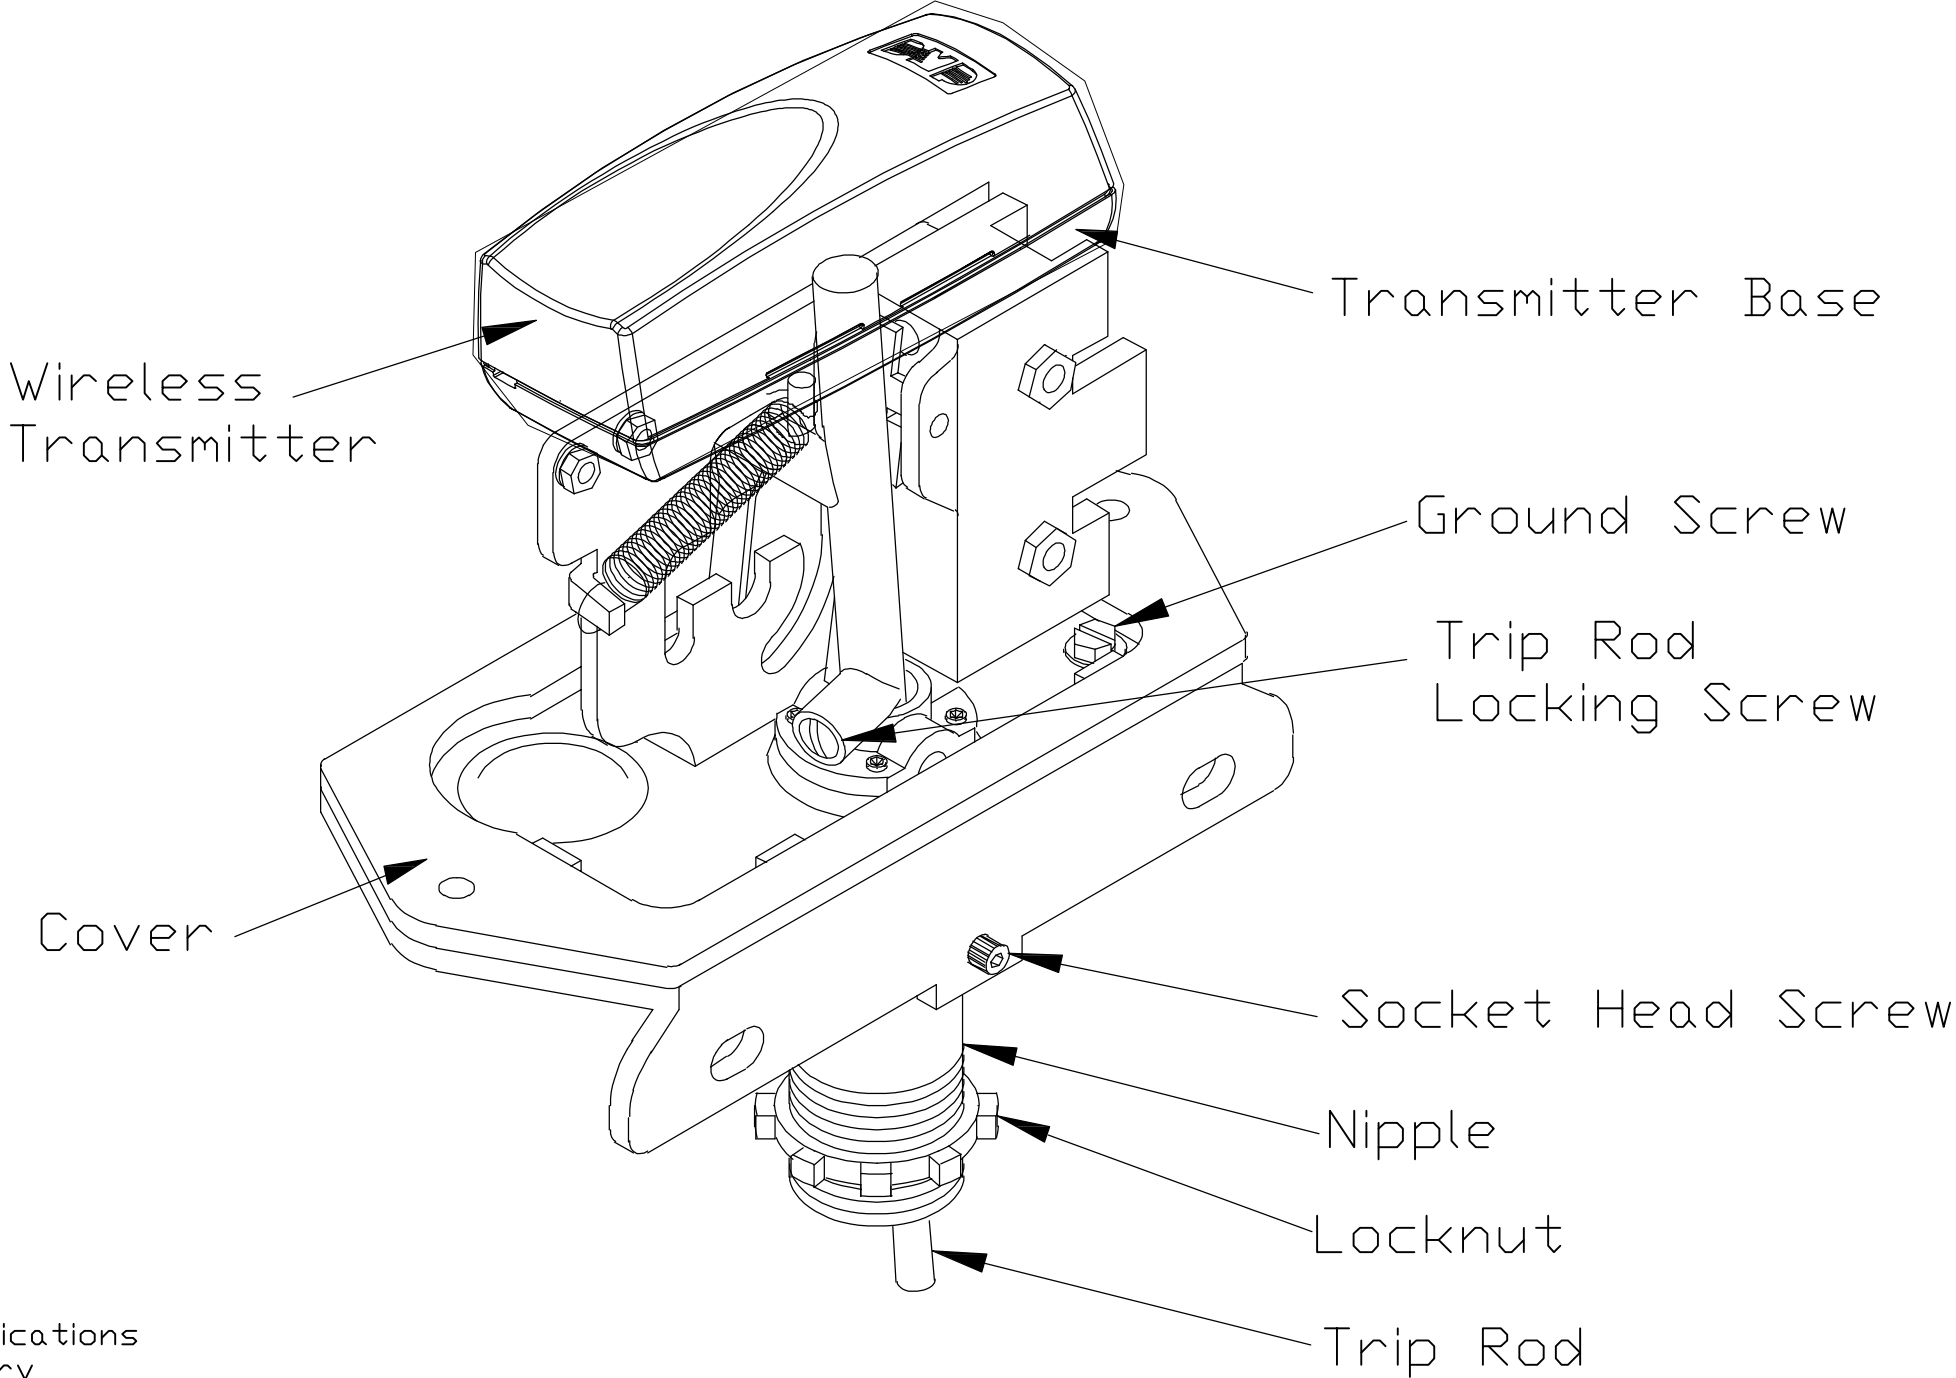

FILE NAME		TITLE 1181-R Wireless PIV Tamper Transmitter	
DRAWN LK	DATE 08-24-09	PART NO.	REV.
CHECKED	SCALE NTS		
APPR'VD	SHEET 1 OF 1		