



XR550 MAN TRAP WIRING (DOOR STRIKE):


1. Connect both 734 modules to the LX500 header of the panel.
 2. Connect the 716 to the LX600 header of the panel.
 3. Set the addresses on the 734s to 1 and 2.
 4. Set the address on the 716 to 0.
 5. Wire a door contact to zone 2 of each 734.
 6. Connect the positive terminal from the power supply to the common on two relays of the 716.
 7. Connect the normally closed side of each 716 relay to the common terminal of the 734 modules.
 8. Connect the normally open terminal of the 734 relay to the positive input of the door strike.
 9. Connect the negative input of the door strike to the negative terminal on the power supply.
- Note: Addressing shown is for example only and is not the only address that will support this feature.

Outside 734 & Reader

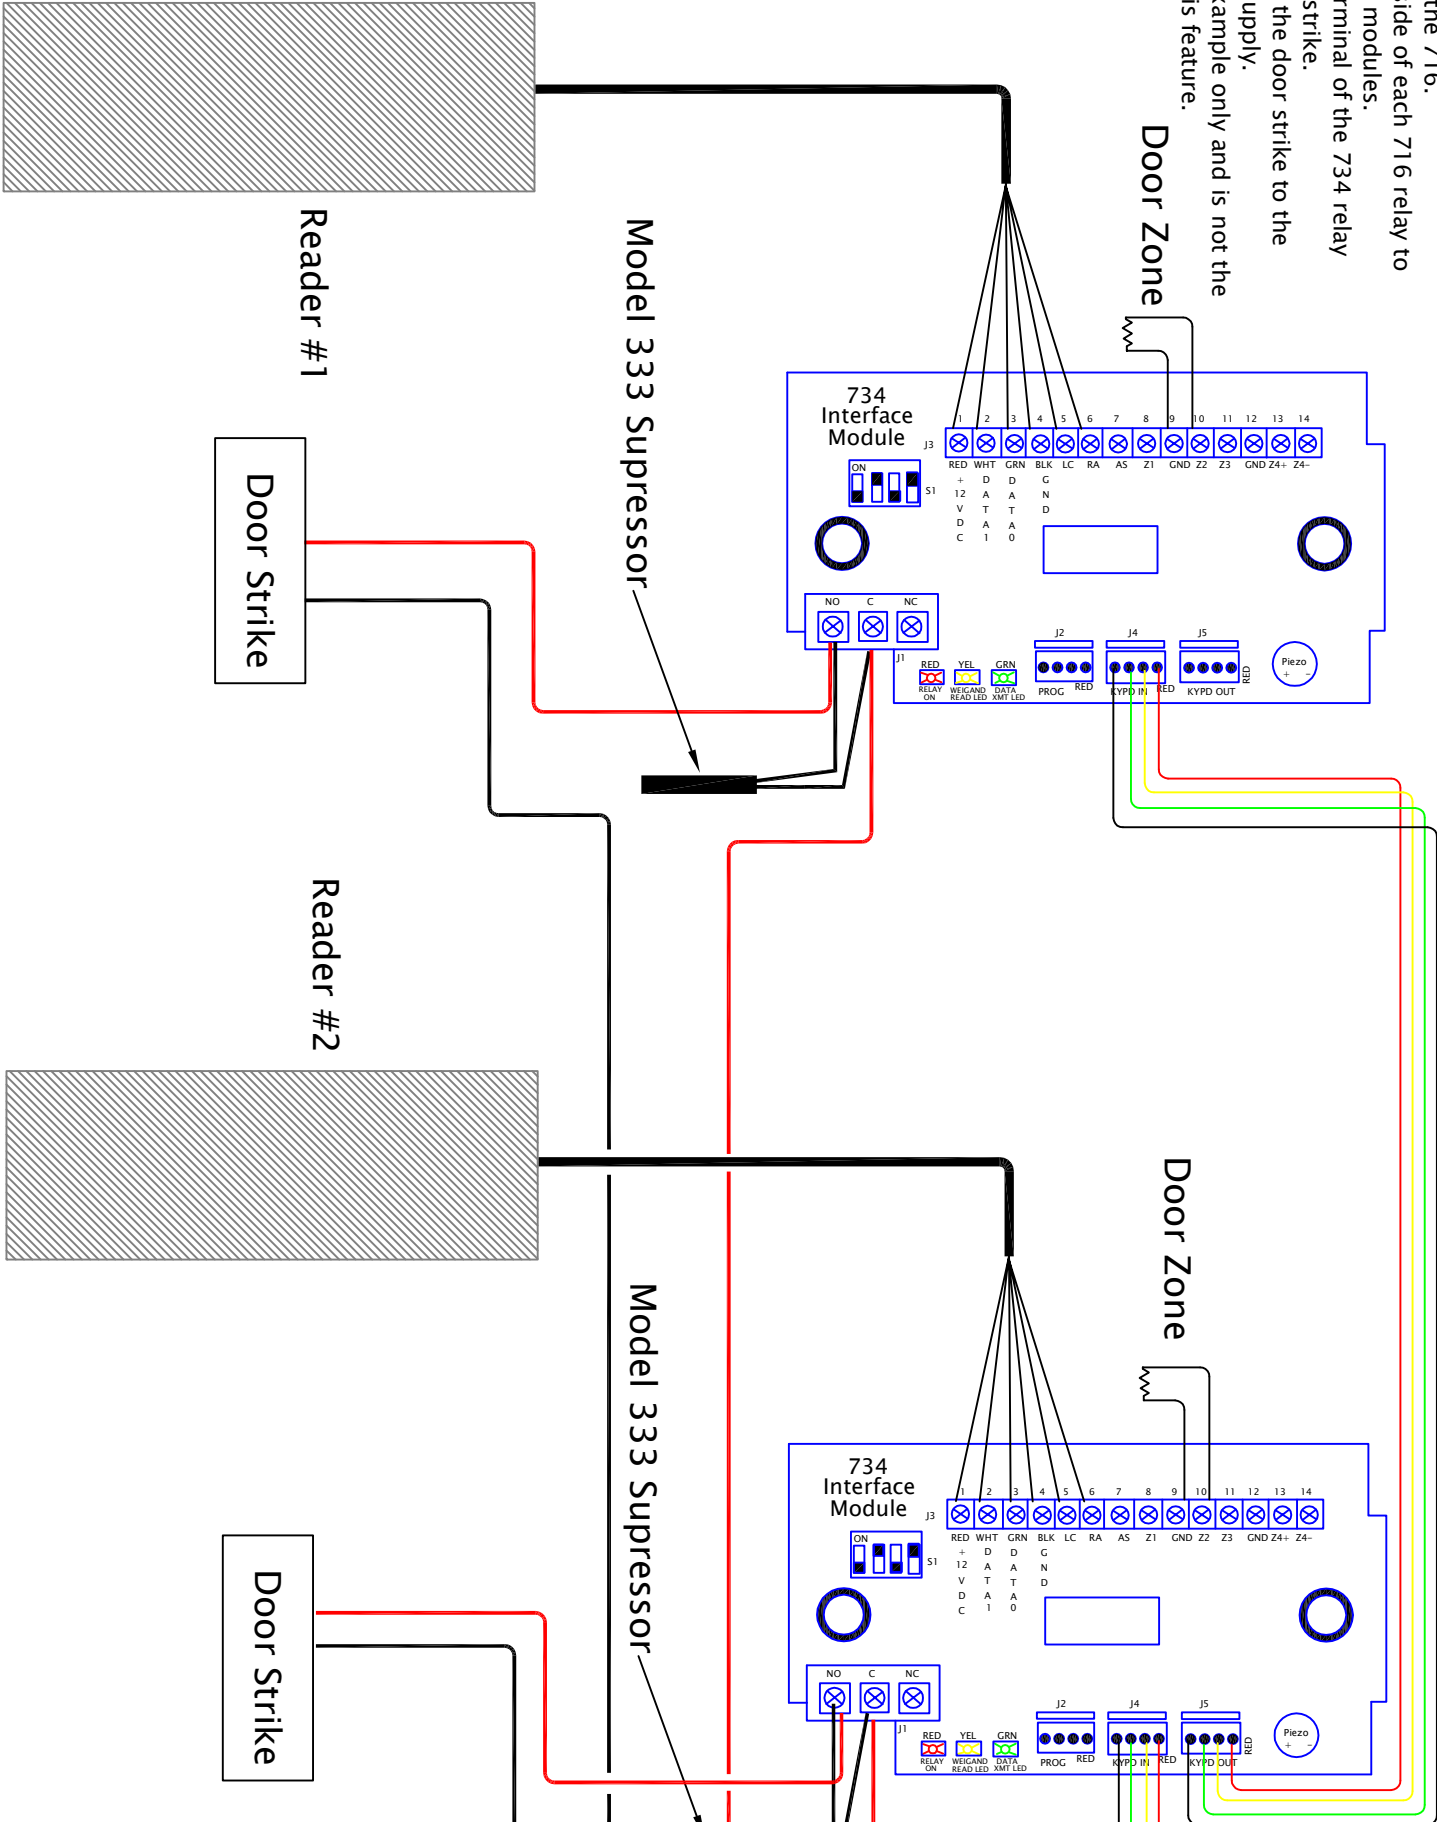

Inside 734 & Reader

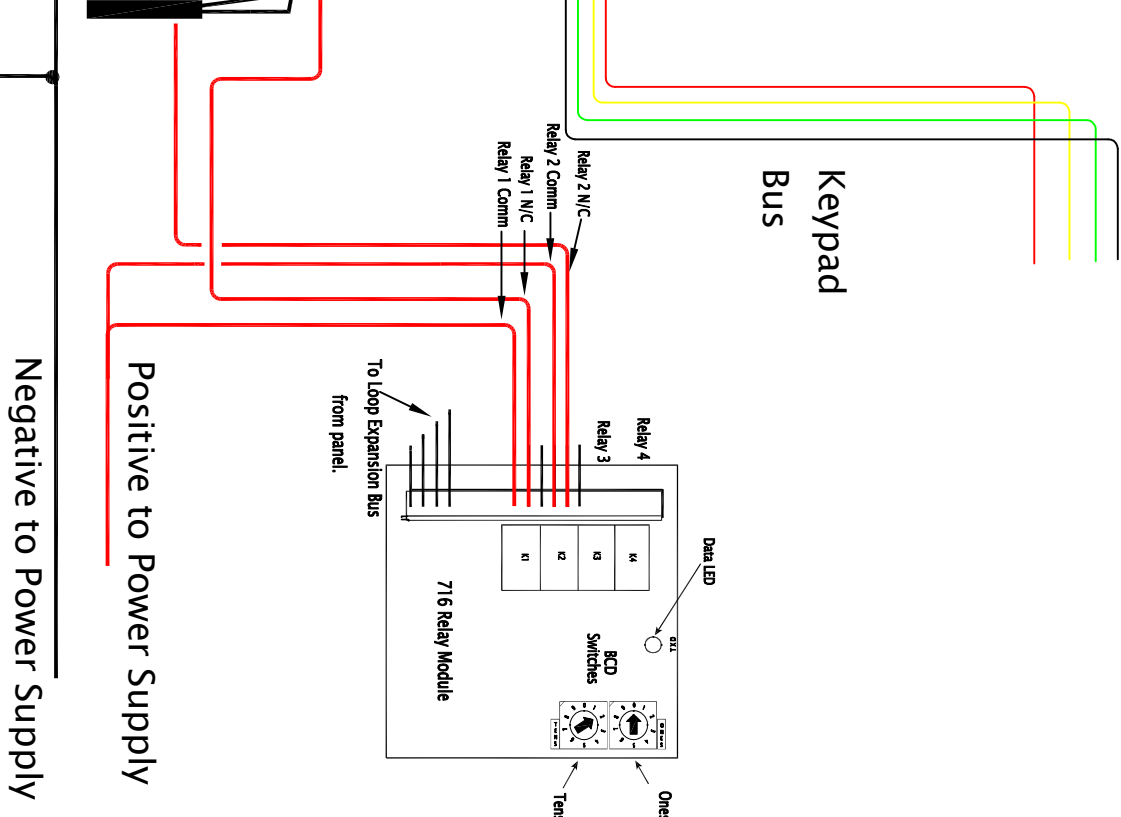

Architects and Engineers CAD Drawings			 Digital Monitoring Products 2841 E. Industrial, Springfield, MO 65802		
FILE NAME			TITLE	Man TrapApplication (Door Strike)	
DRAWN LK	DATE	04-15-2019	PART NO.		
CHECKED	SCALE	NTS	REV.		
APPR'VD	SHEET	1 OF 1			