

## Remote Link & System Link Version 1.25 Feature Update August 2005

### Version 1.25 Software Update

Effective August 2005, all Remote Link and System Link software is being shipped from the factory as Version 1.25 (8/16/05) software. This version is an update from the Version 1.24 (7/5/05) software previously shipped and contains new features.

### Features

#### Operator Configuration

The programming options in the **Remote Link Operator Configuration** window are now available on three tabs, **Operator Information**, **Panel Programming**, and **User and Status Programming**. To give users authority to log in to Remote Link, select **System > Operator Configuration**.

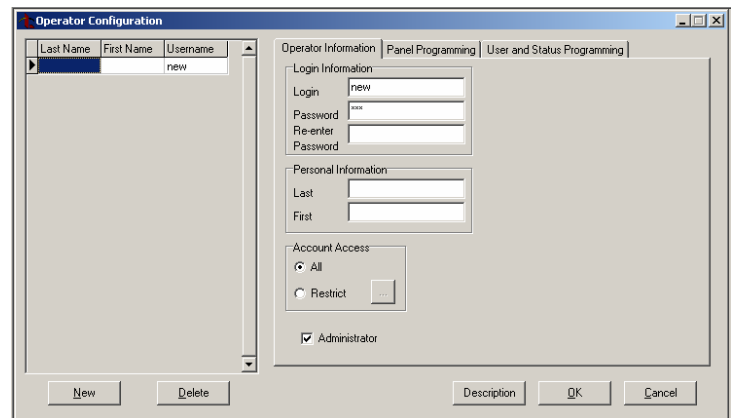
#### Operator Information Tab

Remote Link now provides the option to enter the operator password a second time for verification in the same window.

In addition, Remote Link now provides the option to restrict the operator access to specific accounts.

##### **Login Information:**

To authorize a new operator to log in to Remote Link, click on the **New** button at the bottom left corner of the window. In the Login Information fields, enter a **Login** and **Password** for the new user. At **Re-enter Password** retype the same password to verify. Each login ID and password may have up to 32 characters.

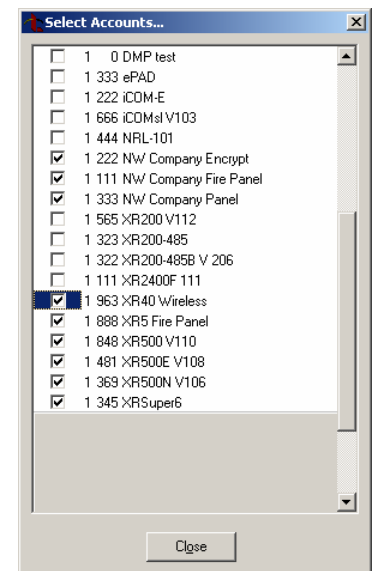
The screenshot shows the 'Operator Configuration' window with the 'Operator Information' tab selected. It contains three sections: 'Login Information' with fields for 'Login' (containing 'new'), 'Password', and 'Re-enter Password'; 'Personal Information' with fields for 'Last' and 'First'; and 'Account Access' with radio buttons for 'All' (selected) and 'Restrict', and a checked 'Administrator' box. At the bottom are 'New', 'Delete', 'Description', 'OK', and 'Cancel' buttons.

**Personal Information:** Enter the operator last and first names.

**Account Access:** To authorize the operator to access all accounts, select **All**. To restrict the operator to certain accounts, select **Restrict** and click the ... button. In the Select Accounts window, place a checkmark next to the accounts the operator is authorized to access.

**Note:** The Account Access restrict option does not prevent an operator from using the trap function to send and/or retrieve changes made by other operators.

**Note:** When the Account Groups module is enabled, the Account Access restrict option does not prevent an operator from adding users.

The screenshot shows the 'Select Accounts...' window with a list of accounts. The accounts are: 1 0 DMP test, 1 333 ePAD, 1 222 iCOM-E, 1 666 iCOMsl V103, 1 444 NRL-101, 1 222 NW Company Encrypt, 1 111 NW Company Fire Panel, 1 333 NW Company Panel, 1 565 XR200 V112, 1 323 XR200-485, 1 322 XR200-485B V 206, 1 111 XR2400F 111, 1 963 XR40 Wireless, 1 888 XR5 Fire Panel, 1 848 XR500 V110, 1 481 XR500E V108, 1 369 XR500N V106, and 1 345 XRSuper6. The '1 963 XR40 Wireless' account is selected with a checkmark. An 'Ok' button is at the bottom.

## Panel Programming Tab

You may click the **All** button to select all options on the Panel Programming Tab. Click the **Clear** button to remove all options.

Check each box to assign the operator authority to perform panel programming options. Each option refers to a menu option under **Programming**.

## User and Status Programming Tab

Remote Link now provides the option for the operator to have separate authority to acknowledge, remove or disable alarms in the Alarm List.

You may click the **All** button to select all options on the User and Status Programming Tab. Click the **Clear** button to remove all options.

**User Programming:** Check each box to assign the operator authority to perform user programming options. Each option refers to a button in the System Status window accessed by selecting **Program > User Codes**.

**Panel Status:** Check each box to assign the operator authority to perform system status commands. Each option refers to a button in the System Status window accessed by selecting **Panel > System Status**.

**Alarm List:** Check the box for each operator to have authority to acknowledge, remove, or disable alarms. When upgrading from previous Remote Link versions the alarm authority options are automatically enabled.

## Cancel Signal Report

Remote Link now supports the XR500 Series panel Version 110 Cancel Signal (\$49) message.

## Ordering the New Software

Remote Link and System Link Updates version 1.24 (8/16/05) are available for download free of charge on the DMP Dealer Direct Website at <http://dmp.com/dealer>. Hard copy updates on CD can be obtained by calling DMP Customer Service at 1-800-641-4282 and ordering the Link Update for a charge.