

Remote Link and System Link July 2009

Version 1.49 Software Update

Effective July 2009, Remote Link and System Link are being shipped as Version 1.49 (7/1/09) software. This version is an update from the Version 1.48 (5/26/09) software previously shipped and contains the following new features:

- Compare Account with Templates
- Text Messaging Rate Plans
- GPRS APN defaults to SECURECOM400

Remote Link and System Link updates are available for download free of charge on the DMP Dealer Direct Website at <http://dmp.com/dealer>.

Features

Copy Existing Account File or Create Templates

A new checkbox option has been added to the Copy Panel window that allows a new template account to be created by copying an existing file. The template can be used to compare panel programming with existing panels.

Template: Select this to create a template account to be added into the Template tab. Enter a name for the template. The template can then be used to compare panel programming against existing panels.



Managing Templates for Comparing Panel Accounts

Template Tab

A new tab has been added in Panel Information to manage templates that can be used to compare panel programming with existing panels.

The Template tab under Panel Information can be used to manage templates that you have created of panel programming and to use as a comparison against existing programming of panel accounts. New templates are added within this tab.

Search: This field allows you to search for a particular panel within the existing templates.

General Information



Any existing templates appear in the list with the Name, Model and Version.

Template Name: This displays the name of the template that you select from the list. You can also change the name of the template as well.

Notes: This gives you the option to makes notes about this template.

New: This allows you to make a new panel template. Select the Model, Version and any Feature Set (if applicable for the selected panel) for the template. Type in a name for the newly created template and click OK. The new template displays in the Template Tab.

Copy Panel: This allows you to make a new template by copying the information from an existing account. Follow the instructions above in "Copy Existing Account File or Create Templates".

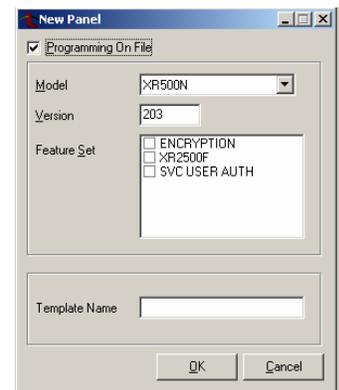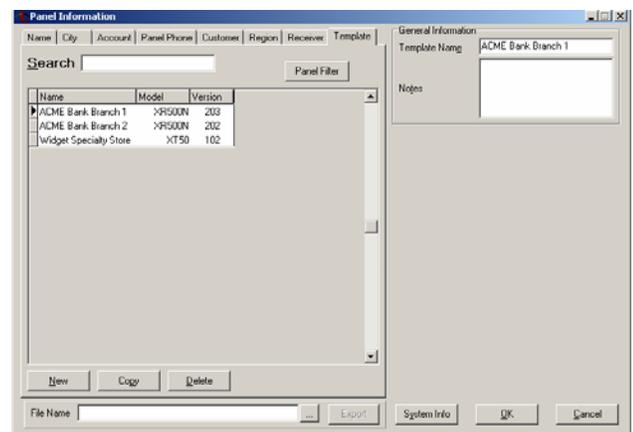

Compare Accounts Report

This option allows comparison of a variety of panels to each other and/or to a template and a report is generated in .xml spreadsheet format. Access this option in **File > Print > Compare Accounts**.

The screenshot shows the 'Compare Accounts' dialog box. In the 'Control Panel' section, the 'Template' radio button is selected. A dropdown menu shows 'ACME Bank Branch 1' selected. The 'Panel Model' is 'XR500N' and the 'Version' is '203'. There are checkboxes for 'Show Like Models Only' and 'Show Like Versions Only'. In the 'Options' section, there are checkboxes for 'Sort by Account', 'Include Users', 'Include Text Names', 'Include Schedules', and 'Include Profiles'. Below these are two tables: 'Select Accounts To Compare' and 'Accounts To Compare'. The 'Select Accounts To Compare' table has 6 rows, and the 'Accounts To Compare' table has 1 row. A right-pointing arrow button is between the two tables.

Receiver	Account	Name
1	1458	Home Town Bank
1	1684	ACME Bank Branch 1
1	1685	ACME Bank Branch 2
1	2255	Home Town Bank Epad
1	2365	Safety Town Bank
1	3636	Safety Town Bank Branch 2

Receiver	Account	Name
1	1459	Summer HomeTown Bank

The screenshot shows the 'Compare Accounts' dialog box. In the 'Control Panel' section, the 'Account' radio button is selected. There are input fields for '1' and '1458' and a 'Load' button. The 'Panel Model' is 'XR500N' and the 'Version' is '203'. There are checkboxes for 'Show Like Models Only' and 'Show Like Versions Only'. In the 'Options' section, there are checkboxes for 'Sort by Account', 'Include Users', 'Include Text Names', 'Include Schedules', and 'Include Profiles'. Below these are two tables: 'Select Accounts To Compare' and 'Accounts To Compare'. The 'Select Accounts To Compare' table has 6 rows, and the 'Accounts To Compare' table has 1 row. A right-pointing arrow button is between the two tables.

Receiver	Account	Name
1	1458	Home Town Bank
1	1684	ACME Bank Branch 1
1	1685	ACME Bank Branch 2
1	2255	Home Town Bank Epad
1	2365	Safety Town Bank
1	3636	Safety Town Bank Branch 2

Receiver	Account	Name
1	1459	Summer HomeTown Bank

Control Panel

Template: Select this option to choose a panel template to compare to existing accounts. If selected, the existing templates display in the drop-down menu that is below. Select the template to compare. Once a template is selected, the panel model information appears to the right.

Account: Select this option to use an existing panel account to compare to another existing account(s). If selected, enter the Receiver number and Account number of the account to compare. Once a panel is selected, click on the Load button and the selected panel model information appears to the right.

Show Like Models Only: If selected, any accounts with the same model number display below under Select Accounts To Compare. If not selected, all accounts display regardless of model.

Show Like Versions Only: If selected, any panels with the same model number and same version display below under Select Accounts To Compare. If not selected, all panels with the same model display regardless of version.

Options

Sort by Account: Select this option to have the spreadsheet report created where each account is compared to the template side-by-side in two columns and other accounts are compared below the first. If not selected, all accounts are compared to the template side-by-side in multiple columns.

Include Text Names: Select this option to have the spreadsheet report list differences in text names for the panel's zones, outputs, devices, etc.

Include Users: Select this option to have the spreadsheet report list differences in users for the account being compared.

Include Schedules: Select this option to have the spreadsheet report list differences in Schedules for the accounts being compared.

Include Profiles: Select this option to have the spreadsheet report list differences in User Profiles for the accounts being compared.

Control Panel

Template Account Panel Model: XR500N
 Version: 203
 1 - 1458 [Load]
 Show Like Models Only Show Like Versions Only

Options

Sort by Account Include Users
 Include Text Names Include Schedules
 Include Profiles

Select Accounts To Compare

Receiver	Account	Name
1	1458	Home Town Bank
1	1684	ACME Bank Branch 1
1	1685	ACME Bank Branch 2
1	2255	Home Town Bank Epad
1	2365	Safety Town Bank
1	3636	Safety Town Bank Branch 2

>

<

Accounts To Compare

Receiver	Account	Name
1	1459	Summer HomeTown Bank

Save To: [] ... [Compare] [Cancel]

Select Accounts to Compare: All accounts to be selected for comparison display here. Select the accounts that you want to compare to the template or account selected above in the Control Panel. Click the account and press the arrow key to place the account in the right column for comparison. You may select as many as you would like to compare.

Accounts to Compare: This column displays all accounts that have been selected for comparison. If you need to remove an account from this column, select and click the arrow button to place the account back into the other column.

Save to: Select the name and location on your computer where you want the spreadsheet report saved.


Compare: Select this to create the spreadsheet report.

Text Messaging

New options have been added to SecureCom Wireless Activations to support text messaging rate plans.

Text Plan: Select the rate text plan for the SIM card. Plans available include:

- None
- SMS100: 100 Messages per month
- SMS200: 200 Messages per month

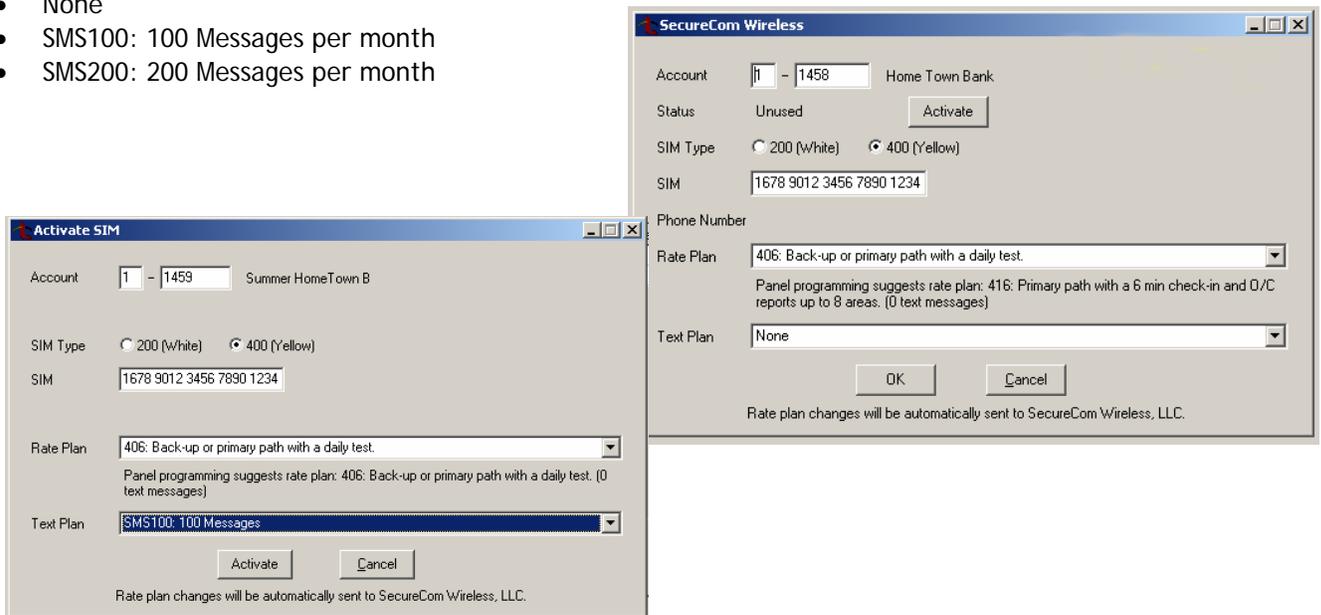


GPRS Access Point Name

The GPRS Access Point Name (APN) default has been updated to SECURECOM400 to support the Level 400 SIM card for the XT Series panels. See the XT Series Version 102 (6/16/09) Feature Update (TU-0514).

First GPRS APN: Enter the first APN (Access Point Name). This allows an access point for cellular communication and is used to connect to a DNS server. The APN may contain up to 32 characters. Default is set to SECURECOM200 when a version 100 or 101 XT30/50 panel is used and the default is set to SECURECOM400 when a version 102 or higher XT30/50 panel is used.

Second GPRS APN: Enter the second APN (Access Point Name). This works as a backup in case the first APN fails. The APN may contain up to 32 characters. Default is set to SECURECOM200 when a version 100 or 101 XT30/50 panel is used and the default is set to SECURECOM400 when a version 102 or higher XT30/50 panel is used.

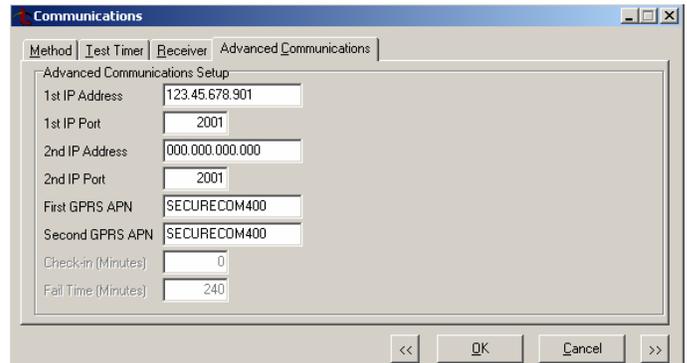

Obtaining the New Software

Remote Link and System Link Version 1.49 (7/1/09) updates are available for download free of charge on the DMP Dealer Direct Website at <http://dmp.com/dealer>.

TU-0524 © 2009 Digital Monitoring Products, Inc.

	800-641-4282	INTRUSION • FIRE • ACCESS • NETWORKS
	www.dmp.com	2500 N. Partnership Boulevard
	Made in the USA	Springfield, Missouri 65803-8877