

698-7800 KEYPAD BACKPLATE

Installation Sheet

DESCRIPTION

The 698-7800 Keypad Backplate is designed to retrofit 7800 Series Graphic Touchscreen Keypads into older 7000 Series Keypad wall installations. The backplate is constructed of durable white or black polycarbonate and is designed to provide full coverage for existing installation holes and other mounting surface imperfections.

COMPATIBILITY

- 7800 Series Graphic Touchscreen Keypads

WHAT'S INCLUDED

- One 698-7800 Backplate
- Hardware pack

INSTALLATION

During backplate installation, refer to Figure 1.

1. Remove the existing keypad from the mounting surface.
2. Align the keypad backplate to cover the corner mounting holes of the previously installed keypad.
3. Route the keypad wiring through the wire routing holes (A).
4. Use the four provided countersunk Phillips screws to secure the backplate to the wall through the backplate mounting holes (B) or electrical box mounting holes (C). If an electrical box is not provided, use wall anchors. Tighten screws in a crisscross pattern. Do not overtighten.
5. Use the the provided #6 x 1/4" Phillips screws to secure the 7800 Series base to the backplate keypad mounting holes (D). Wire the keypad and attach the cover. Refer to the 7800 Series Installation Guide (LT-1162).

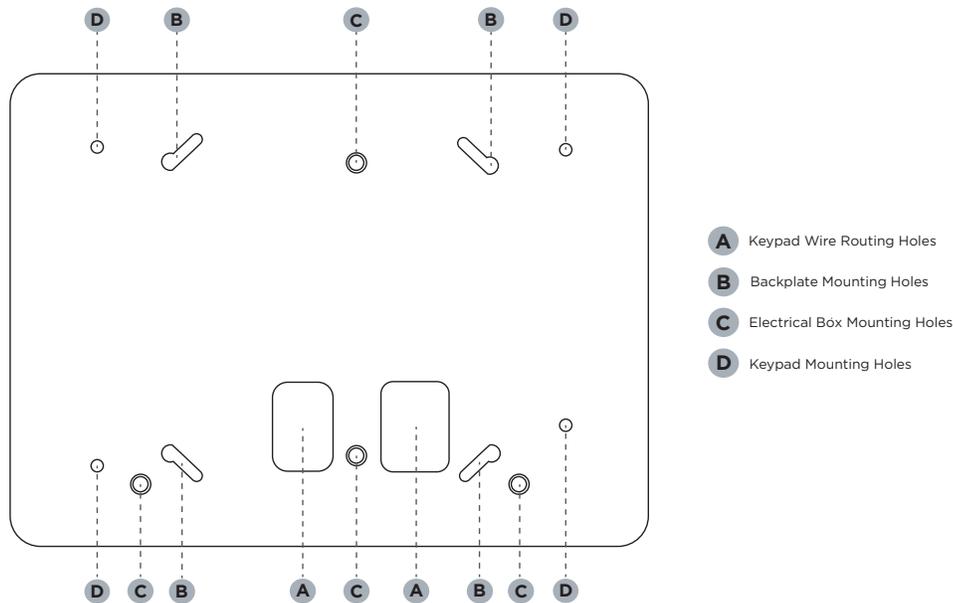


Figure 1: Mounting Hole Locations

SPECIFICATIONS

Dimensions 7.067" W x 5.256" H x 0.125" D (17.95 cm W x 13.35 cm H x 0.318 cm D)
Material Polycarbonate

ORDERING INFORMATION

698-7800-W (White)
698-7800-B (Black)