

## 7800 Series Graphic Keypads

July 2013

### Version 101 Software Update

Effective July 18, 2013, all 7800 Series Graphic Keypads will be manufactured with updated Version 101 (6/28/13) software. Version 101(6/28/13) will begin shipping as current inventory of 7800 keypads is depleted. This is expected to occur mid to late August 2013.


When purchasing a new keypad to take advantage of the new Z-Wave menus before current inventories are depleted contact DMP Customer Service and request a keypad with Version 101 (6/28/13) software.

### Feature

#### Z-Wave Control

7800 Series Graphic Keypads now provide users with the ability to control Z-Wave devices from the keypad touch screen. The new graphical Z-Wave menus are accessed from the Carousel menu on the keypad's main screen. Menus are provided for Lights, Locks, Thermostats and Z-Wave Favorites. The graphical Z-Wave menus are compatible with systems that have been updated to the following:

- XT30/XT50 Series panels using new Version 115 or higher software or
- XR150/XR350/XR550 Series panels using new Version 101 or higher software
- 738Z Z-Wave Interface Module using new Version 101 or higher firmware

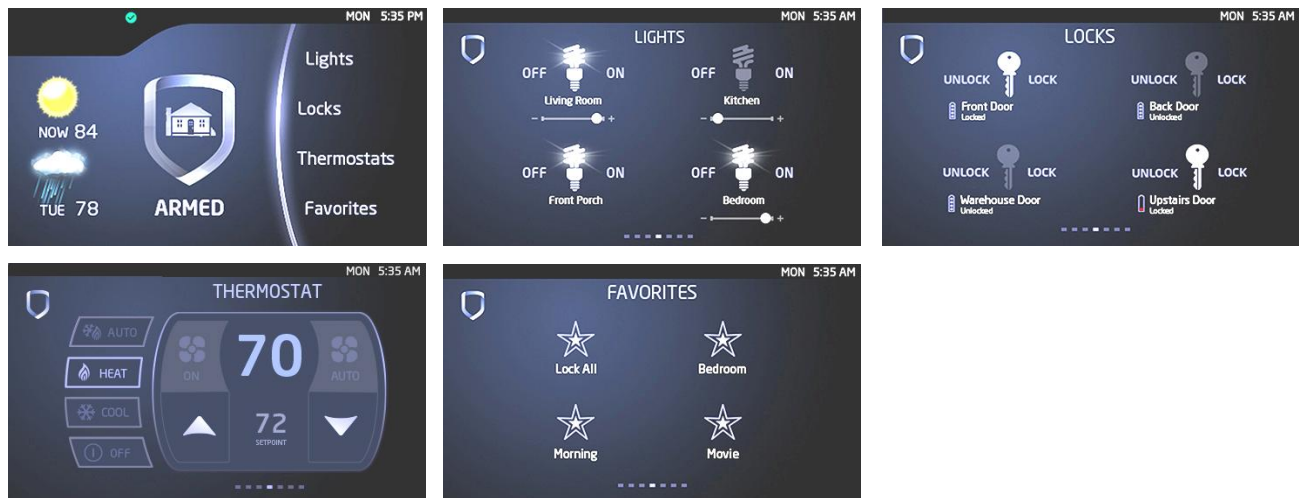

To learn more about the operation of these menus refer to the 7800 Series Graphic Keypad User's Guide (LT-1191).

A corresponding set of options has been added to the keypad's Installer Options menu, just after Dealer Options, to allow the installer to select which menus appear in the Carousel.

**ZWAVE LIGHTS**  
YES NO

#### Z-Wave Lights

Select YES to display Lights in the Carousel Menu. If NO is selected, Lights will not be displayed. Default is NO.

**ZWAVE LOCKS**  
YES NO

#### Z-Wave Locks

Select YES to display Locks in the Carousel Menu. If NO is selected, Locks will not be displayed. Default is NO.

**ZWAVE THERMOSTAT**  
YES NO

#### Z-Wave Thermostats

Select YES to display Thermostats in the Carousel Menu. If NO is selected, Thermostats will not be displayed. Default is NO.

**ZWAVE FAVORITES**  
YES NO

#### Z-Wave Favorites

Select YES to display Favorites in the Carousel Menu. If NO is selected, Favorites will not be displayed. Default is NO.



## Zone Monitor and Entry Delay tones

In addition to existing keypad volume settings such as the Entry Delay tone and touch screen presses, the volume of the Zone Monitor tone is now controlled by the Keypad Volume setting in the options screen. This setting does not affect the volume of the Entry Delay tone when the system has been in alarm.

Keypad tones always at max volume	Keypad tones controlled by the volume setting
Exit Delay	Entry Delay
Entry Delay after Alarm	Zone Monitor
Alarm Cadences	Touch screen presses
Trouble Tones	

## Updated Operation

### Status LED and Display Brightness

Previously, when the keypad Brightness was set to the lowest possible level of no bars, the Armed Status LED would turn off when the display turned off due to inactivity. For added versatility, the display and Status LED will now turn off if the Keypad Brightness is set to no bars when the system is disarmed. If the Display Brightness is set to 1 bar the display will turn off but the Status LED will remain on. The Status LED will always illuminate red when the system is armed regardless of the Keypad Brightness setting.

### Zone Monitor Display

The Zone Monitor Alert message window now automatically closes after 10 minutes. The window previously remained open until closed by a user.


### Dealer Contact Information

The title of the Company Contact window has been changed to "CONTACT INFORMATION". This menu is accessed by pressing the dealer logo in the top left corner of the main screen.

## Obtaining the New Software

To update to the latest software, return the 7800 Series Graphic Keypad to DMP and simply indicate "Update to Latest Version Software" on the RMA tag. If you need RMA tags, contact DMP Customer Service at 1-800-641-4282.

When purchasing a new keypad to take advantage of the new Z-Wave menus before current inventories are depleted contact DMP Customer Service and request a keypad with Version 101 (6/28/13) software.

	800-641-4282		TU-0683 © 2013 Digital Monitoring Products, Inc.	
	www.dmp.com		INTRUSION • FIRE • ACCESS • NETWORKS	
	Designed, Engineered and Assembled in the USA		2500 North Partnership Boulevard	
			Springfield, Missouri 65803-8877	