


PASSIVE INFRARED SENSOR

PA-450PI WIDE ANGLE : 36' (11m)



PET IMMUNE

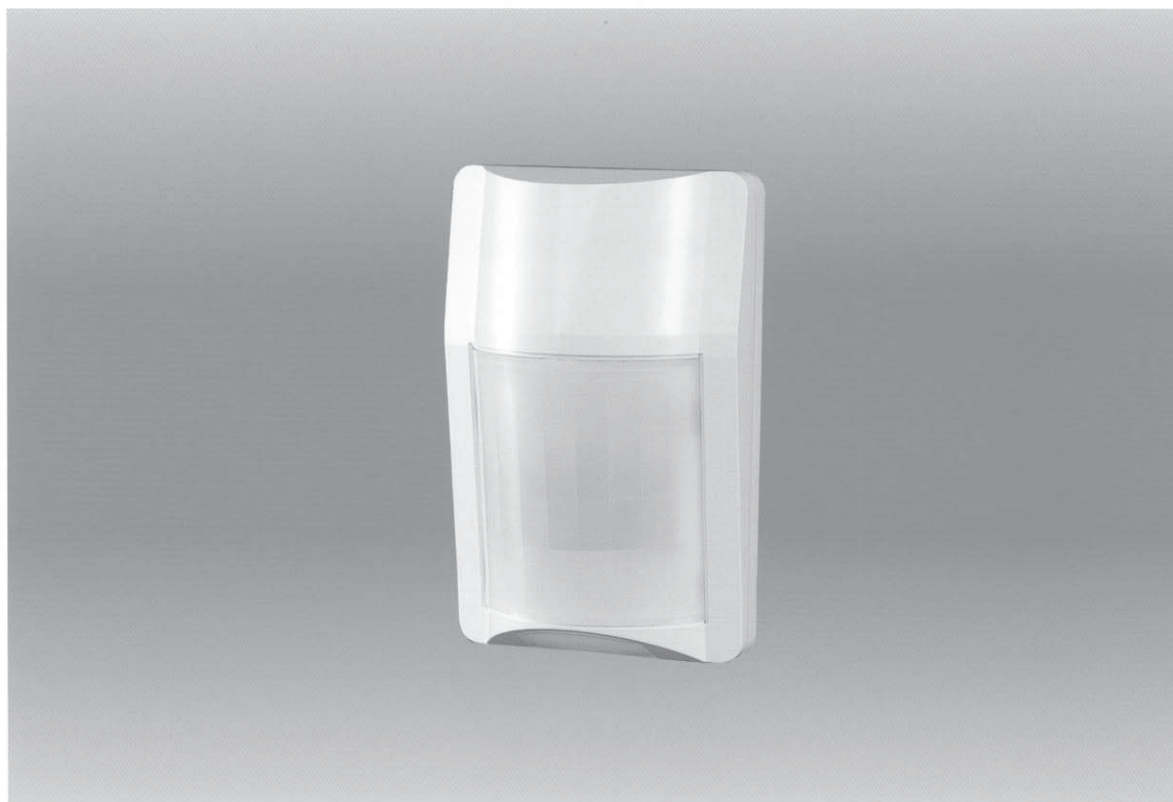

PET IMMUNITY

Multiple Zone Technology ensures 40 lbs (20kg) pet immunity with outstanding high performance and reliability. The newly developed pet immune lens creates precise alignment of each "pet zone" with the CPU.

NEW DESIGN CPU

PULNiX newly developed 4bit exclusive microprocessor for PA-450PI.

In addition to improvement of pulse count, PA-450PI is equipped with Auto-reset memory.

HIGH STABILITY

Immunities against Radio frequency, power line noise, Radiation noise and static electricity are improved.

SILENT RELAY

Photo-mos FET switch relay adopted at alarm output. Completely noiseless by eliminating the movable part which is inside of the relay. At the same time, quick response and long life are maintained.

VARIOUS FUNCTIONS

All the models are equipped with Tamper, Auto-reset memory, photo-mos FET switch.


AREA ADJUSTMENT

The coverage pattern can be adjusted to allow for different mounting heights by moving the inner unit.

PASSIVE INFRARED SENSOR

■ COVERAGE

● PA-450PI WIDE ANGLE

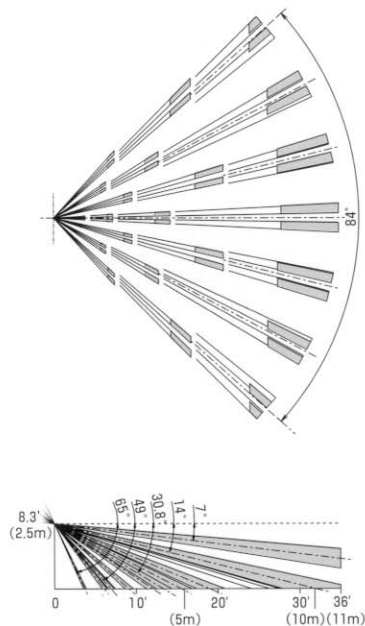


■ TERMINAL ARRANGEMENT

<STANDARD ARRANGEMENT>

POWER ALARM
10~18VDC 24V/0.25A
25mA (AC/DC)
non-polarity N.C./N.O.

TAMPER
30VDC/0.1A
N.C.

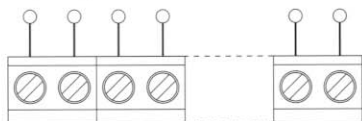


■ OPTIONAL

Wall / Ceiling mount attachment
BCW-401



■ EXTERNAL DIMENSIONS (Unit : inch (mm))

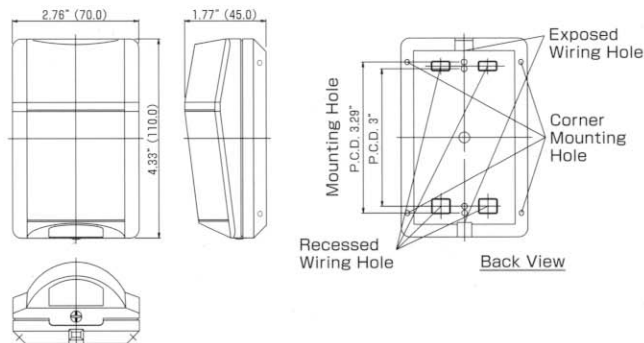

■ SPECIFICATIONS

Model	PA-450PI
Detection system	Passive infrared
Coverage	Wide angle 36° (11m) Max
Sensitive Zone	29 pairs
Supply voltage	10 to 18V DC (non-polarity)
Current consumption	25mA Max.
Alarm output	Dry contact (semi-conductor) (N.O./N.C. selectable) Reset : Approx. 2 secs., Rating : 24V, 0.25A Max (protective resistance 3.3Ω)
Tamper output	0.1A 30V N.C.
Alarm LED (Red)	<ul style="list-style-type: none"> •Blinking at warming up •Lighting at alarm (LED disabled) •Blinking at memory activated (3min.) •Lighting at memory indication (47min.)
Coverage adjustment	Vertically 3 steps
Pulse count	2/4 selectable
Alarm memory	Autoreset : 3 minutes blinking, 47 minutes lighting and automatically reset
Low voltage notice	Dry contact alarm
Ambient temperature range	-15°C to +55°C (+5°F to +131°F) without condensation
Mounting position	Indoor use only (ceiling mount with optional attachment BCW-401)
Weight	120g (4.2oz)
Appearance	Body : ABS resin , Lens : PE resin

*The specifications are subject to change without notice.

The passive infrared sensor is designed to detect infrared energy variations caused by the presence of a human body.
Therefore, note that similar variations in conditions in protected area, due to other reasons, may cause the sensor to create an alarm as it is unable to distinguish between sources.

Please Note : This sensor is designed to detect intrusion and to initiate an alarm; it is not a burglary-preventing device. PULNiX is not responsible for damage, injury or losses caused by accident, theft, Acts of God (including inductive surge by lightning), abuse, misuse, abnormal usage, faulty installation or improper maintenance.

LEAF 2-01P16-3

PULNiX

In Japan

Takenaka Engineering Co., Ltd
83-1, Gojo-sotokan,
Higashino, Yamashina-ku,
Kyoto 607-8156, Japan
Tel : 81-75-501-6651
Fax : 81-75-593-3816

In the U.S.

Pulnix Sensors Inc.
230 E. Caribbean Drive
Sunnyvale,
CA 94089, U.S.A.
Tel : 408-747-0100
Fax : 408-734-1100

In Australia

Pulnix Sensors Inc.
Unit 16, 35 Garden Road,
Clayton, Victoria 3168,
Australia
Tel : 03-9546-0533
Fax : 03-9547-9450

Pulnix Sensors Inc.
Brisbane office : 1/50 Logan
Road, Woolloongabba
Queensland
4102, Australia
Tel : 07-3891-3344

In the U.K.

Pulnix Europe Ltd.
Pulnix House, Avary Court,
Wade Road, Basingstoke,
Hampshire. RG24 8PE, U.K.
Tel : 01256-475555
Fax : 01256-466268

TAKEX PASSIVE INFRARED SENSOR

Wide angle protection : PA-450PI (40 lbs PET IMMUNE)


Instruction Manual

We appreciate your purchase of a TAKEX passive infrared sensor. This sensor will provide long and dependable service when properly installed. Please read this Instruction Manual carefully for correct and effective use.

Please Note : This sensor is designed to detect intrusion and to initiate an alarm ; it is not a burglary-preventing device.

TAKEX is not responsible for damage, injury or losses caused by accident, theft, Acts of God (including inductive surge by lightning), abuse, misuse, abnormal usage, faulty installation or improper maintenance.

1. PARTS DESCRIPTION

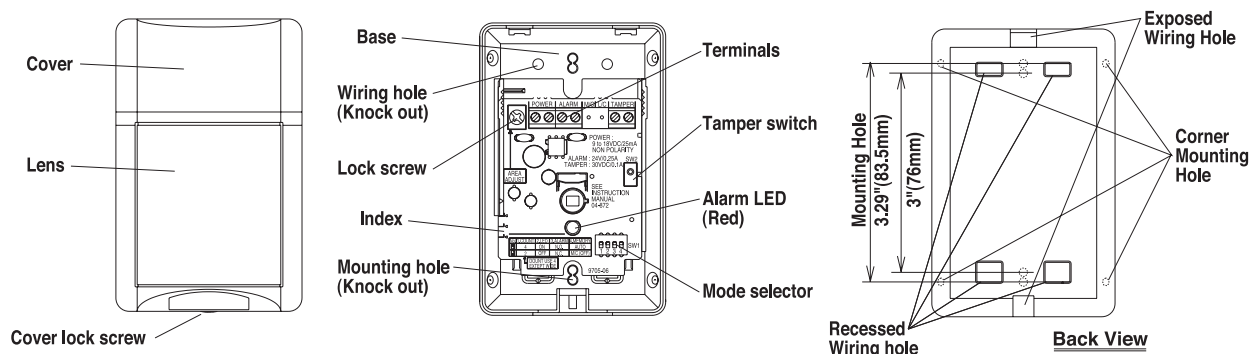

2. DO'S AND DON'T'S

- Install the sensor in a location such that intruders are more likely to cross the protection zones, rather than approach head on.
- Do not install in a site which is subject to electrical noise or intense vibration.
- Avoid direct sunlight, spot light or intense reflections on the sensor or the protection zone.
- Do not install the sensor outdoors (indoor use only).
- Do not install the sensor directly on the ceiling. (When installed on ceiling, use optional attachment BCW-401.)

- The passive infrared sensor is designed to detect infrared energy variations caused by the presence of a human body. Therefore, note that similar variations in conditions in protection area, due to other reasons, may cause the sensor to create an alarm as it is unable to distinguish between sources.


[MAINTENANCE]

- When the unit is soiled, clean the cover with a soft cloth moistened with a small amount of cleansing solution. Do not use chemicals such as thinners or alcohol.
- Check operation once a week. Do not fail to check operation whenever furniture in coverage area is moved.

3. COVERAGE RANGE AND PET IMMUNITY

Wide Angle (PA-450)


unit : ft (m)

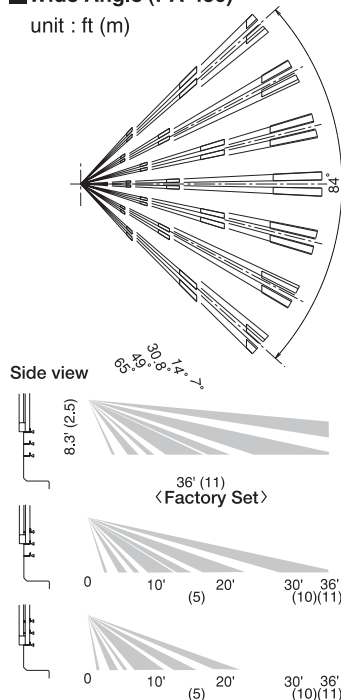

PROTECTION AREA ADJUSTMENT


The area of protection can be adjusted to allow for different mounting heights as below side view. Loosen Lock Screw, and by moving the inner PCB upwards, the coverage of the sensor can be shortened.

There are three field coverage index marks that are printed onto the PCB located on the left hand side just below the left PCB guide rail. They are to be matched to the bottom of the guide rail. If the PCB is raised past the bottom index the tamper plunger will not activate, leaving the circuit open; in alarm.




PET IMMUNITY

- The sensor is designed to not detect animals under 40lbs. (20kg).
- To maintain maximum pet immunity, the sensor is required to be installed 8.2ft (2.5m) from the floor vertically without changing the set up as it comes.
- The sensor may detect multiple animals in the protection area even that are smaller than 40lbs.
- Area adjustment by PCB will decrease the pet immunity.
- It is therefore recommended to use optional BCW-401 multi purpose mounting bracket if area adjustment is required, which will minimize the performance deterioration of the pet immunity.




4. WIRING

POWER ALARM
10~18VDC 24V/0.25A
25mA (AC/DC)
non-polarity N.C./N.O.



TAMPER
30VDC/0.1A
N.C.



[Allowable wiring distance between sensor and power source]

Size of wire used	Distance at 12VDC
AWG 22 (Dia. 0.65mm)	830 ft. (250m)
AWG 20 (Dia. 0.80mm)	1470 ft. (450m)
AWG 18 (Dia. 1.00mm)	2300 ft. (700m)

- The maximum wire length, when two or more units are connected, is the above distance divided by the number of units.
- The protection circuit can be wired to a distance of 3,300 ft (1,000m) with AWG 22 (0.65mm dia.) wire.
- All wiring should be in accordance with the national electric code NFPA-70.
- The power supply used with this unit must have a minimum 4 hours standby power capability.

5. INSTALLATION

1. Loosen cover lock screw and detach the cover.
2. Open knockout hole.
3. Install the base on the wall.
* Two mounting pitches are available.
* When installed on wall corner, make use of knockouts on sides.
4. Connect wires to terminals (Refer to 4. WIRING)
* Plug up an opening of wiring hole.
5. Attach the cover, and tighten cover lock screw.

7. MODE SETTING

Sensor operation can be changed by mode selector on PWB unit.

●Pulse count : 1

- 4 : Least sensitive, prevents false alarms caused by temperature fluctuation.
- 2 : Normally set to this position.

●Alarm LED : 2

- ON : Lights at alarm
OFF : LED disabled
* Memory function always activate.

6. OPERATION

1. Turn the power ON, and wait for 1 minute until the alarm LED stops blinking.
2. Walk test in the protection area to check if an alarm is activated. Check on both of the alarm LED and control panel.
It is important to check operation whenever the area of protection is changed.
3. After correct operation has been confirmed, turn the alarm LED OFF with mode selector on PWB unit. (When set at OFF, the alarm LED does not light even if an alarm is activated.)

●Selection of alarm contact : 3


- N.O. : Close at alarm
N.C. : Open at alarm

●AUTO RESET MEMORY : 4

- Auto : Auto reset operation
OFF : No operation

Operation :

Memory is always stored when sensor is armed.
When an alarm has been activated, the alarm LED blinking for 3 min. and then remains lit for 47 min. It automatically reset and memory is also canceled. In case that the sensor retrigger while its LED is lit, LED lights for further 47 min. after that.



8. SPECIFICATIONS


Model	PA-450PI
Detection system	Passive infrared
Coverage	Wide Angle 36' (11m) Max.
Sensitive zone	29 Pairs
Supply voltage	10 to 18V DC (non-polarity)
Current consumption	25mA Max.
Alarm output	Dry contact (Semi-Conductor) (N.O. / N.C. selectable) Reset : Approx. 2sec., Rating : 24V, 0.25A Max (protective resistance 3.3Ω)
Tamper output	0.1A 30V N.C.
Alarm LED (Red)	: Blinking at warming up : Lighting at alarm (LED disabled) : Blinking at memory activated (3 min.) : Lighting at memory indication (47 min.)
Coverage adjustment	Vertically 3 steps
Pulse count	2/4 selectable
Alarm memory	Autoreset : 3 minutes blinking, 47 minutes lighting and automatically reset
Low voltage notice	Dry contact alarm
Ambient temperature range	-15°C to +55°C (+5°F to +131°F) without condensation
Mounting position	Indoor use only (ceiling mount with optional attachment BCW-401)
Weight	120g (4.2oz)
Appearance	Body : ABS resin Lens : PE resin

The specifications are subject to change without notice.


9. EXTERNAL DIMENSIONS

unit : inch(mm)

■PA-450



■BCW-401 (Optional)

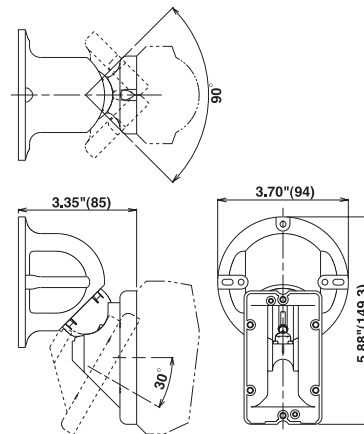

Limited Warranty :

TAKEX products are warranted to be free from defects in material and workmanship for 12 months from original date of shipment. Our warranty does not cover damage or failure caused by Acts of God, abuse misuse, abnormal usage, faulty installation, improper maintenance or any repairs other than those provided by TAKEX. All implied warranties with respect to TAKEX, including implied warranties for merchantability and implied warranties for fitness, are limited in duration to 12 months from original date of shipment. During the Warranty Period, TAKEX will repair or replace, at its sole option, free of charge, any defective parts returned prepaid. Please provide the model number of the products, original date of shipment and nature of difficulty being experienced. There will be charges rendered for product repairs made after our Warranty Period has expired.



TAKENAKA ENGINEERING CO., LTD.

In Japan

Takenaka Engineering Co., Ltd.
83-1, Gojo-sotokan, Higashino,
Yamashina-ku, Kyoto 607-8156, Japan
Tel : 81-75-501-6651
Fax : 81-75-593-3816
[http : // www. takex-eng. co. jp /](http://www.takex-eng.co.jp/)

In the U.S.

Takek America Inc.
230E, Caribbean Drive
Sunnyvale, CA 94086, U.S.A.
Tel : 408-747-0100
Fax : 408-734-1100
[http : // www. takex. com](http://www.takex.com)

In Australia

Takek America Inc.
Unit 16/35 Garden Road, Clayton,
3168 Victoria, Australia
Tel : 03-9546-0533
Fax : 03-9547-9450

Takek America Inc.
Brisbane office : 1/50 Logan
Road, Woolloongabba
Queensland 4102, Australia
Tel : 07-3891-3344
Fax : 07-3891-3355

In the U.K.

Takek Europe Ltd.
Takek House, Avary Court, Wade Road,
Basingstoke, Hampshire, RG24 8PE, U.K.
Tel : (+44) 01256-475555
Fax : (+44) 01256-466268
[http : // www. takexeurope. com](http://www.takexeurope.com)

No.04-936 0410